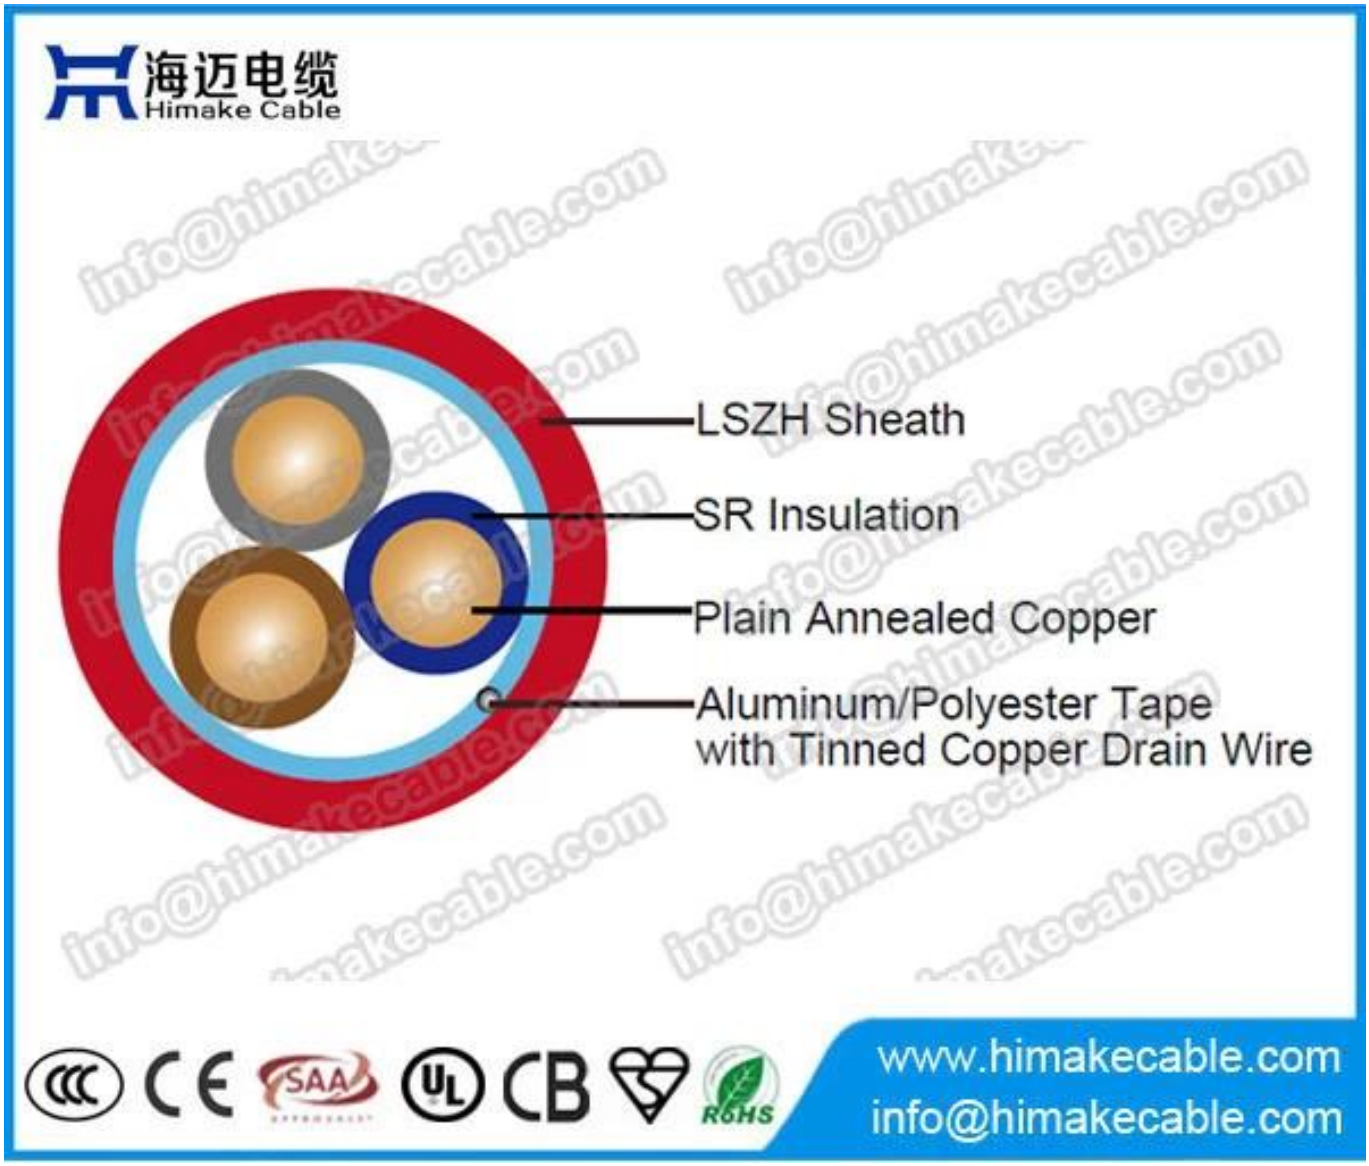

منتج وصف:

موصل نحاسي عادي ، مطاط سيليكون أو منخفض دخان الهالوجين الصفر المعزول ، ألومنيوم/الشريط البوليستر الشاشة ، عاريه الأسلاك الارضيه النحاسية الخفيفة أو الأسلاك الارضيه النحاسية العارية ، الدخان المنخفض صفر الهالوجين الخارجي الغمد. الأحمر أو الأبيض أو البرتقالي أو الأسود مقاومه للحريق إلى iec 331 و bs6387. مثبط لهب bs5839-1:2003 و iec 60332-3 cat bs7629-1 1997. انبعاثات الغاز الحمضي إلى bs en 50267 (iec60754) ، وانبعاثات الدخان إلى bs 50268 اون (iec 61034) وانتشار اللهب إلى bs en 50265 ، bs en 50266 (iec60332).

خصائص المنتج:

خاليه من التدخين الهالوجين ، مقاومه النار ، مقاومه للاشعه فوق البنفسجية ، متوافق مع المنسق

تطبيق المنتج:

ويتميز كابل الإنذار البريطاني القياسي البشرة الناعمة المقاومة للحريق باستخدام الدخان المنخفض والغمد الخارجي الخالي من

الهالوجين. وغالبا ما تستخدم الكابلات في أجهزه إنذار الحريق والاضاءه في حالات الطوارئ.

منتج معلمه: (إذا كان المزيد من التفاصيل يرجى البريد الكتروني لنا: info@himakecable.com)

النوى وحجم موصل (مم2)	موصل مواد	(موصل التقطع (مم	الوزن تقريبا (كغم/كم)	جرعه زائده تقريبا (ملم)
2c × 1.0 + e	النحاس السهل الأكرم	1/1.13	90	7.5
3 1.0 × ج + e	النحاس السهل الأكرم	1/1.13	110	8.0
4 1.0 × ج + e	النحاس السهل الأكرم	1/1.13	135	8.8
7 1.0 × ج + e	النحاس السهل الأكرم	1/1.13	170	10.5
12 c × 1.0 + e	النحاس السهل الأكرم	1/1.13	270	13.7
2c × 1.5 + e	النحاس السهل الأكرم	1/1.38	110	8.0
3 1.5 × ج + e	النحاس السهل الأكرم	1/1.38	130	8.4
4 1.5 × ج + e	النحاس السهل الأكرم	1/1.38	160	9.5
7 1.5 × ج + e	النحاس السهل الأكرم	1/1.38	230	11.3
2c × 2.5 + e	النحاس السهل الأكرم	1/1.78	160	9.0
3 2.5 × ج + e	النحاس السهل الأكرم	1/1.78	200	10.5
4 2.5 × ج + e	النحاس السهل الأكرم	1/1.78	250	11.7
2c × 4.0 + e	النحاس السهل الأكرم	7/0.85	260	11.3
3 4.0 × ج + e	النحاس السهل الأكرم	7/0.85	315	12.1
4 4.0 × ج + e	النحاس السهل الأكرم	7/0.85	380	13.3

Quality Comparison

Purity of copper



Excellent 99.93% Oxygen Free Copper , Bright color with long life time .

Inferior Copper inluding a lot of impurity Easy heat, short life Easily cause fire

Flame Test

Excellent No spread , and release a little white smoke

Inferior Keep burning , and pop a lot of black HCL toxic smoke

Resistance Test

Excellent low resistivity, high conductivity

Inferior High resistivity,High consumption . Easy to buring .

Eccentricity Ratio



Excellent Insulation thickness uniformity

Inferior Insulation thickness nonuniform Easy electric leakage fire disaster,

High Pressure Test

Excellent Jacket no any damage

Inferior Jacket damaged , reveal conductor

High Temperature Test

Excellent Jacket no any damage

Inferior Jacket damaged , reveal conductor

Low Temperature Test

Excellent Jacket no any damage

Inferior Jacket damaged , reveal conductor