


概要

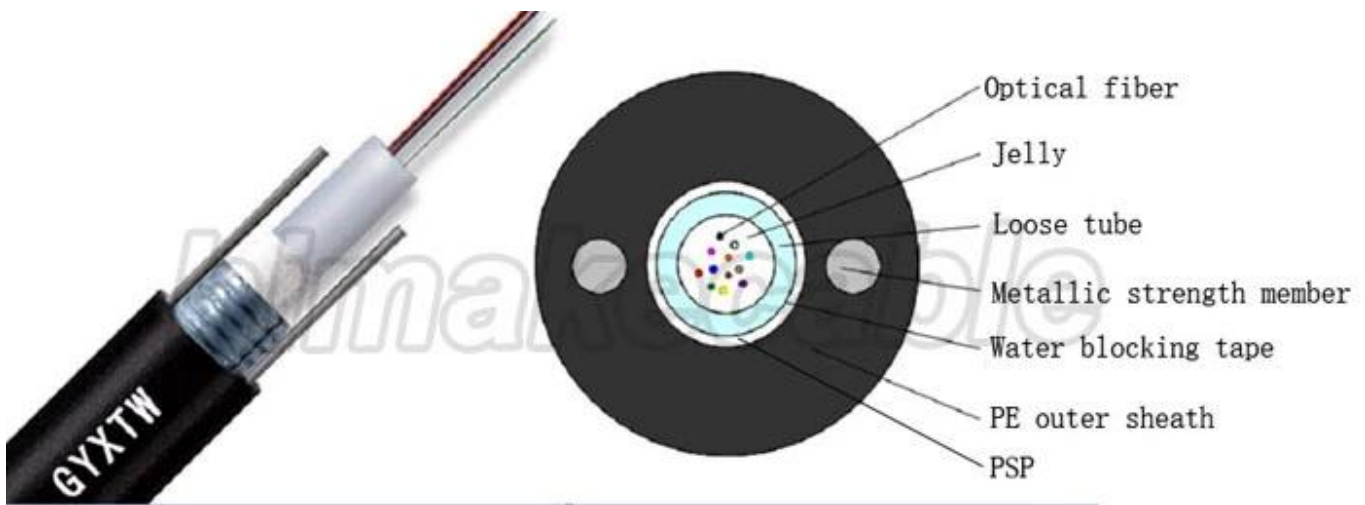

- 2~24 コア構造
- コネクタ
- ケーブル長
- ケーブル径 1.2 mm
- ケーブル径
- ケーブル径
- ケーブル径
- ケーブル径
- ケーブル径

概要

- 1.ケーブル径
- 2.ケーブル径
- 3.ケーブル径
- 4.ケーブル径
5. PE ケーブル径
- 6.ケーブル径
- 7.ケーブル径: -40 ~ +60 C

概要

Table 1

Table 2 & Table 3


Table 4

Table 5 (continued) info@himatecable.com

No.	Cable	Weight kg/km	Outer diameter mm		Tensile strength (N)		Bend radius mm/1000 mm	
			Overall	Fiber	Static	Dynamic	Static	Dynamic
2-6	10.1	104	110	220	1500	600	1000 300	
8-12	10.6	114	110	220	1500	600	1000 300	
14-24	11.2	128	120	240	1500	600	1000 30	

Table 6

1. Table 7

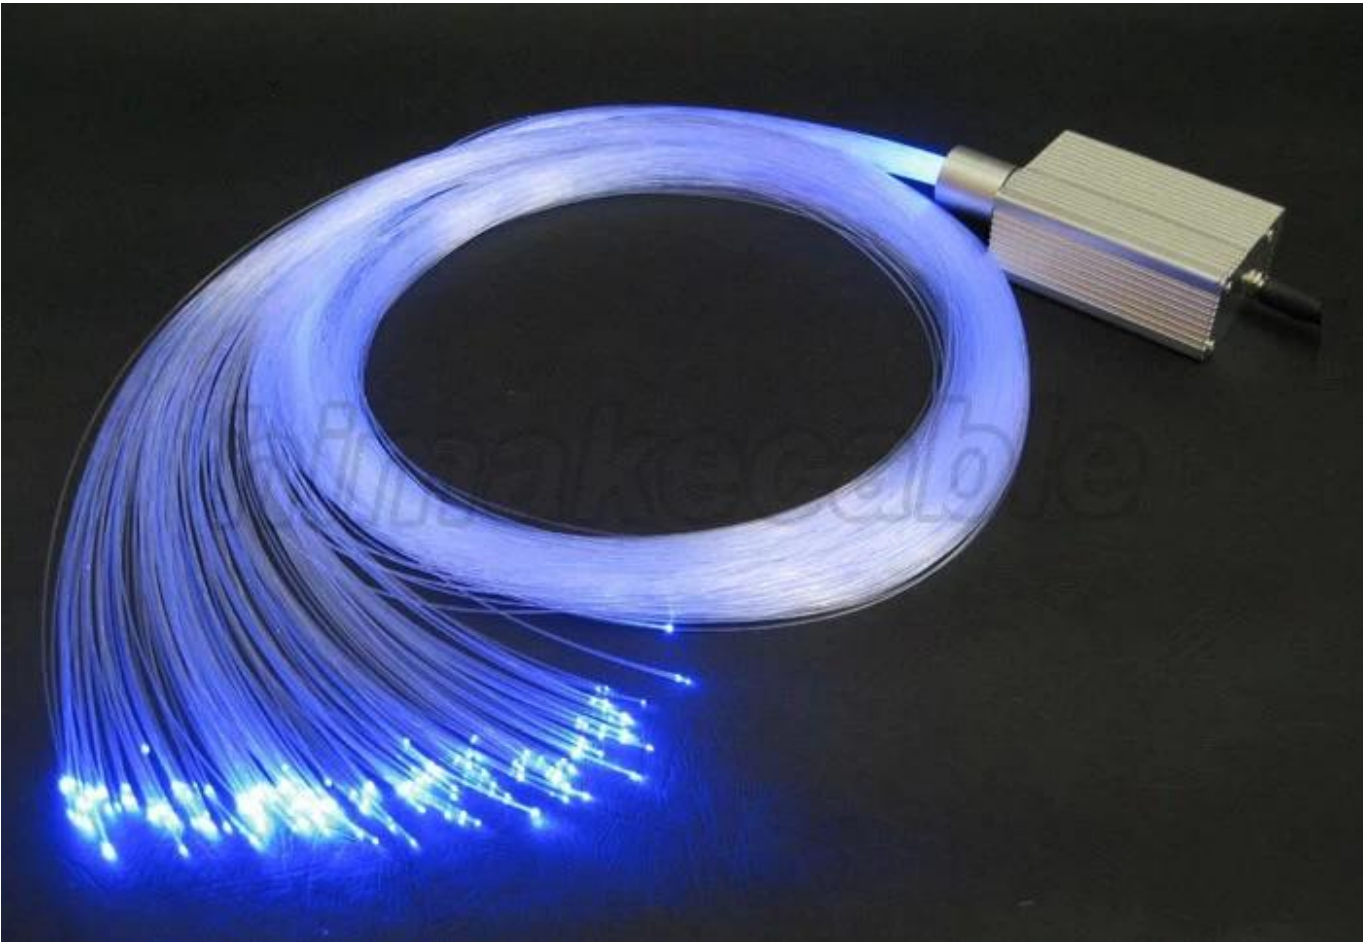



□□□□□□□□



3. 10 60







