




海迈电缆
Himake Cable

www.himakecable.com
info@himakecable.com

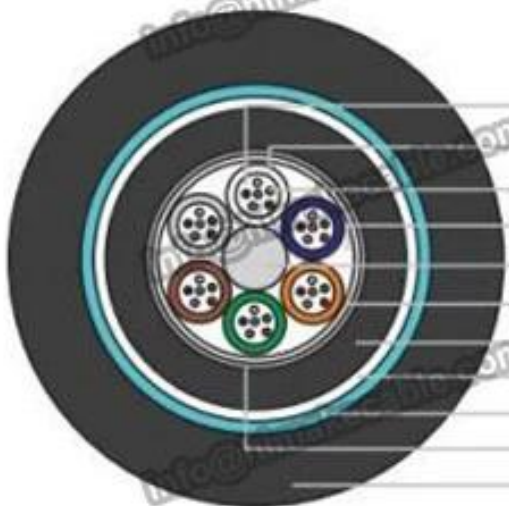

光纤油膏Fiber gel

松套管Loose tube

UV光纤UV fiber

缆芯填充物Cable core filling

中心加强件Central strength member

扎纱及填充物Binding yarn and filling

聚乙烯内护套 PE inner sheath

阻水层Waterblocking layer

铠装层Armor

铝塑复合带Aluminum-plastic laminated tape

聚乙烯外护套 PE outer sheath



www.himakecable.com
info@himakecable.com

GYTA53 250um (APL) (PSP) YD/T 901-2001 IEC60794-1

- 1.2 ~ 228
- 2.
- 3.
- 4.
- 5.
- 6.
- 7.PE
- 8.

□□□□

□□□□ □□ □
 □□□□□□□□□□ □□□□□□
 □□□□□□□□

0000 (0000000000000000 info@himakecable.com)

項目	単位	単位	測定項目		測定値 (N)		測定値 (N/1000)	
項目	単位	単位	項目	項目	項目	項目	項目	項目
2-24	13.3	210	12.5 D	35%	3000	1000	3000	1000
26-36	13.6	220	12.5 D	35%	3000	1000	3000	1000
38-60	14.1	225	12.5 D	35%	3000	1000	3000	1000
62-72	14.6	255	12.5 D	35%	3000	1000	3000	1000
74-96	16.2	305	12.5 D	35%	3000	1000	3000	1000

□ □ □ □

- [illegible]



Brand new material

- > **Smooth**
- > **Anti-UV**
- > **Long-life**

High Quality Fiber

- > **Fast**
- > **Long and stability transmission**
- > **Low Attenuation.**



High Quality PBT Loose Tube Material

- > **Anti-aging**
- > **Good Protection**

ADVANCED PRODUCTION EQUIPMENT

Advanced Production Equipments can guarantee qualified product.



Optic Fiber Cable Testing

- Fiber Testing
- Testing after fiber coloring
- Testing after fiber stranding
- Testing after fiber optic cable jacketing



APPLICATION



✓ Pipeline



✓ Overhead



✓ Direct bury

Packaging & Shipping

PACKING AND SHIPPING



- Each single length of cable shall be reeled on wooden Drum suitable for long-distance shipment.