


□□□□:

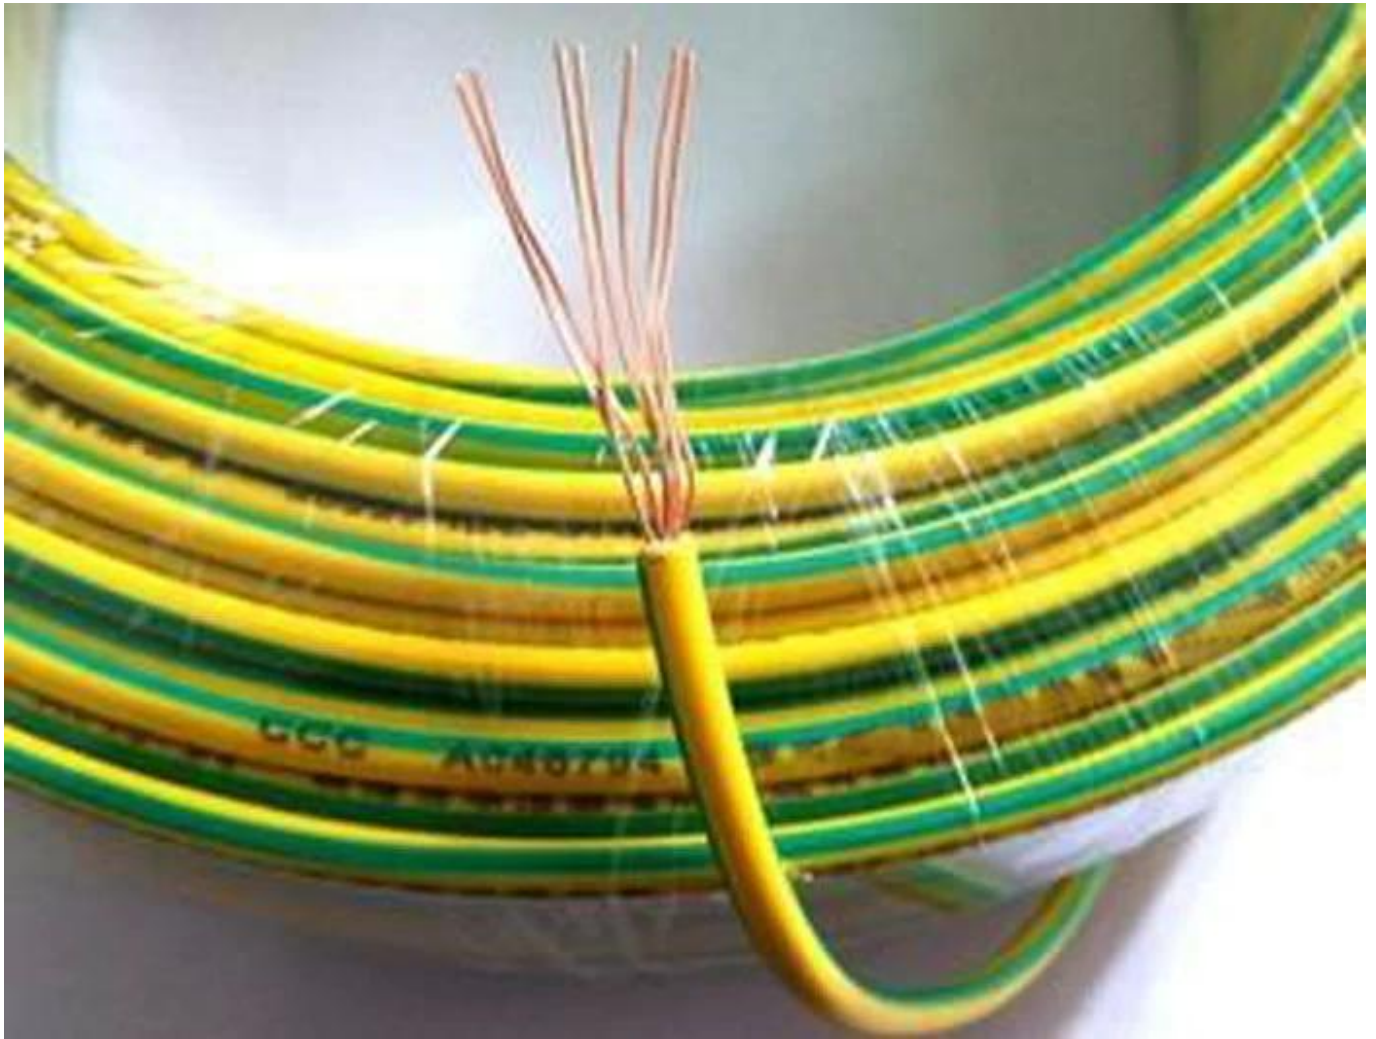

□□□□: 300/500V, 450/750V

□□: □□□□□□, □□□□□□□□

□□□□□□□□□□: 0.75 ~ 300 sqmm

□□: PVC, □□PVC, LSZH

□□□□: □□/□□

□□□□□□: 70°C, 90°C, LSZH□□□□□□ 150 °C

□□: □□100□, □□ □□

□□□□□□: BV, BLV, BLVR, H05V-U, BS6004 6491X, H07V0R, H05Z-U, H07Z-R

□□□□: IEC60277, BS6004, VDE0281, gb/t 5023

□□□□:

UV resistant, RoHS compliant

Notes:

Standard length is 100m, other lengths are available on request.

Contact: (Email: info@himakecable.com info@himakecable.com)

Dimensions (mm ²)	Material	Material (mm)	Dimensions (mm)	Resistance $\Omega \cdot \text{km}^{-1} @ 20^\circ\text{C}$ (M $\Omega \cdot \text{km}$)	Weight (kg/100m)
1x0.5	1 conductor	pvc/0.6	2.4	0.015	8.1
1x0.75	1 conductor	pvc/0.6	2.6	0.012	10.9
1x1.0	1 conductor	pvc/0.6	2.8	0.011	13.7
1x1.5	1 conductor	pvc/0.7	3.3	0.011	20.0
1x2.5	1 conductor	pvc/0.8	3.9	0.010	31.1
1x4.0	1 conductor	pvc/0.8	4.4	0.0085	45.7
1x6.0	1 conductor	pvc/0.8	4.9	0.0070	65.2
1x10	1 conductor	pvc/1.0	6.4	0.0070	112

Notes:

- Standard length is 100m, other lengths are available on request.



2. 0000000 0000000 000000000000000000, 00000000000000

0000



□□□□□□



3. 10mm 60mm





5. 00000000 00000000000000, 0000000000, 00000000000000000000,0



