





himakecable



www.himakecable.com
info@himakecable.com

CCC CCA 300/500V

300/500V

5 CCA

0.5~16

PVC

PVC

品牌： 金湖金湖金湖金湖金湖

工作温度范围 70℃~90℃


额定电压 100 伏特

额定电压 RVVB RVV H05VV-F H05RR-F H07RN-F

符合标准 IEC60277 BS6500 VDE0281 GB/T 5023 IEC60332



符合RoHS指令




本产品符合RoHS指令

本产品符合RoHS指令

本产品符合RoHS指令 H05VV-F 符合RoHS指令 H07RN-F

联系我们 info@himake.com

额定电压	导体截面	导体直径	导体电阻20℃ (Ω/100m)	导体电阻70℃ (mΩ•km)	额定电压	额定电压
300/300V	2×0.5	3.8×6.0	39.0	0.012	10	28
300/300V	2×0.75	3.9×6.4	26.0	0.010	13	35
300/500V	2×0.75	5.0×7.6	26.0	0.010	13	44



1. □□□ □□□□□ □□□□□□□□□□□□□□□□□□□



2. 00000000 00000000 000000000000000000000000000000000000

□□□□




□□□□□□□□



3. 15" 60 internationally



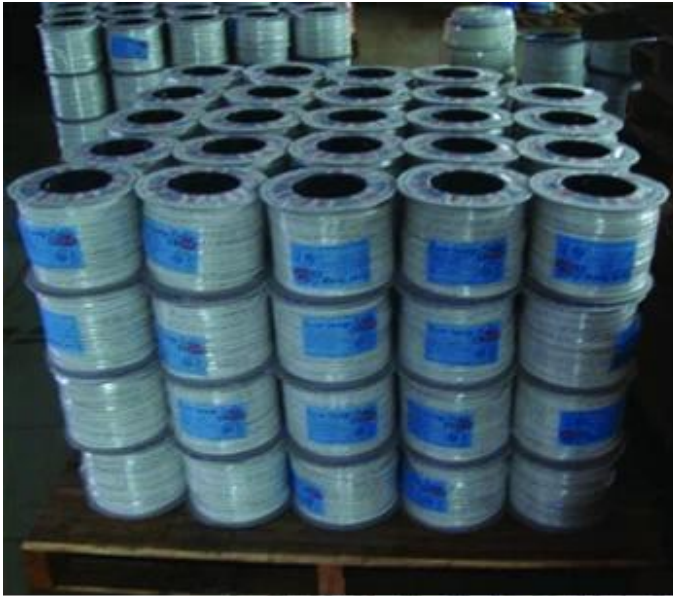

4. 000000 000 0 000 000000000000 0000000 0000000000000000000000



5. 5월 10일 어린이날 기념 행사



