


□□□□:

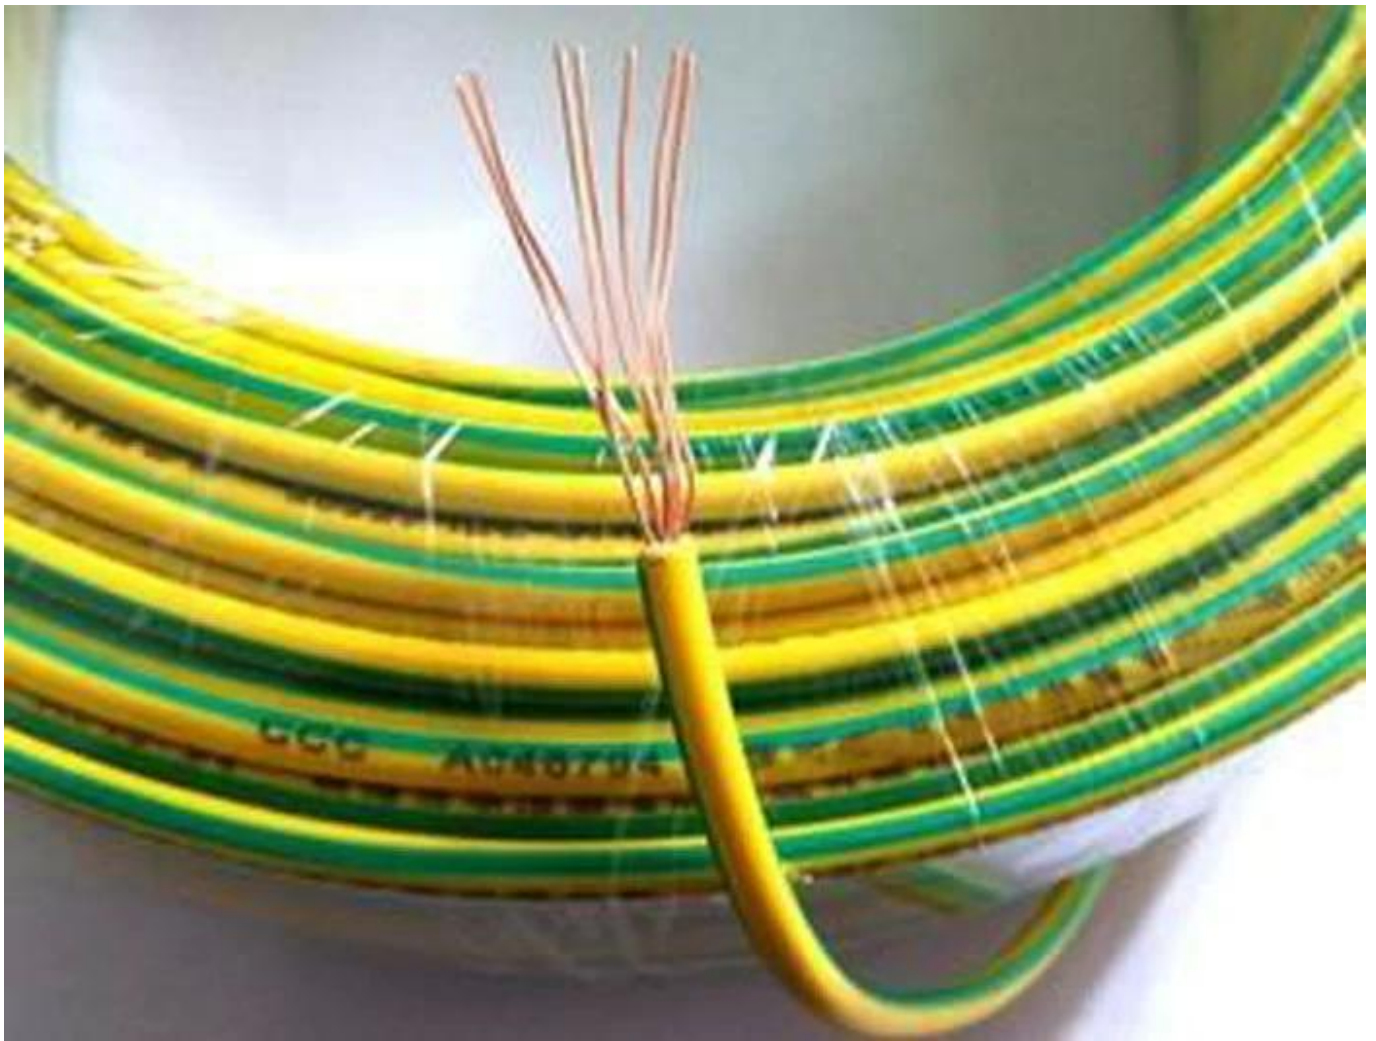

□□□□: 300/500 v, 450/750 v

□□: □□□□□□, □□□□□□□□

□□□□□□□□: 0.75 ~ 300 sqmm

□□: □□□□□□□□□□□□□□

□□□□: □□/□□

□□.□□□□: 70°C, 90°C, □□150°C□□□□

□: □□100□, □□ □□

□□□□□□: BV, BLV, BLVR, H05V-U, BS6004 6491X, H07V0R, H05Z-U, H07Z-R

□□□□: IEC60277, BS6004, VDE0281, gb/t 5023

□□□□:









2. 0000000 0000000 00000000000000000000, 00000000000000

0000





□□□□□□







3. 10 60 international ly









5. 000000 000000, 00000000, 00000000000 000000000000000000.0





