

Compliant with RoHS; Halogen-free; CCS + CCA/CCA/CCU/BC; HDPE/PE or FR-PVC/PVC; Flame-retardant; Low smoke and halogen-free

Applications

Supports 100 MHz and 10Base-T, ISDN, Token Ring (IEEE 802.5), 100BASE-T4/TX (FAST Ethernet), 100VG-AnyLAN Fast Ethernet, 1000Base-T Gigabit Ethernet, 1000Base-TX Gigabit Ethernet, ATM 52/155 Mbps, 622 Mbps

Packaging (Contact us at info@himakecable.com)

| Category | Conductor | Insulation Thickness (mm) | Outer Diameter (mm) | Shielding Thickness (mm) | Overall Diameter (mm) |
|------------------|----------------|---------------------------|---------------------|--------------------------|-----------------------|
| FTP Cat5e PVC | 4x2x0.5(24AWG) | 1/0.51 | 1.01 | 5.5 | 40 |
| FTP Cat5e Plenum | 4x2x0.5(24AWG) | 1/0.51 | 1.01 | 5.5 | 43 |




CAT5e UTP Bulk Cable



CAT6 UTP Bulk Cable



CAT6A UTP Bulk Cable

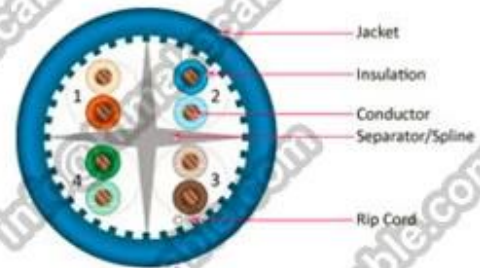

Packaging & Shipping



305m/pull out box



colour pull out box



2boxes in carton



305m/wooden reel



1000ft/wooden reel



305m wooden reel in carton



warehouse



warehouse



shipment



□□ □□□□□□ □ □□□□□□□□"□□□□".