

Compliant with RoHS; Compliant with REACH; Compliant with CCS + CCA/CCA/CCU/BC Compliant HDPE/PE or FR-PVC/ or PVC Compliant; Compliant

Specifications


Supports up to 250MHz bandwidth and is compatible with 10Base-T, ISDN, 4.16Mbps Token Ring(IEEE802.5), 1Gbps Ethernet (IEEE802.3), 100Mbps TP-PMD, 100BASE-T4/TX(Fast Ethernet), 100VG-AnyLAN Fast Ethernet, 1000Base-T Gigabit Ethernet, 1000Base-TX Gigabit Ethernet, 155Mbps ATM, 622Mbps ATM

Packaging (Contact us at info@himakecable.com)


Category	Conductor	Stranding	Outer Diameter	Weight	Length
		(#/mm)	mm	kg/100m	ft
Cat.6 FTP PVC	4x2x0.57(23AWG)	1/0.57	1.02	7.1	46
Cat.6 FTP Plenum	4x2x0.57(23AWG)	1/0.57	1.02	7.1	48




CAT5e UTP Bulk Cable

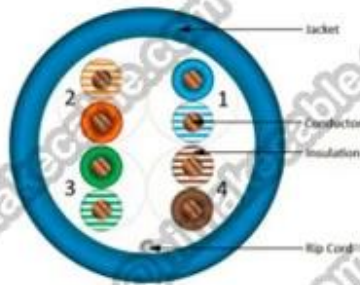

CAT6 UTP Bulk Cable

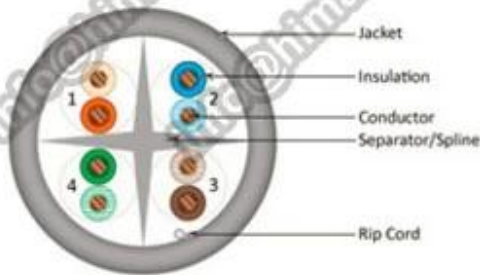

CAT6A UTP Bulk Cable

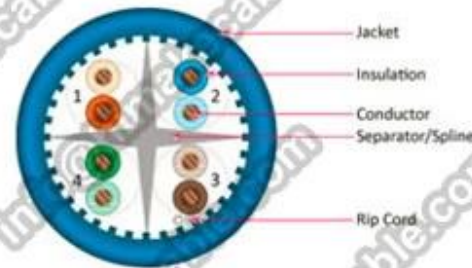

Packaging & Shipping

