

□□□□



□□□□ 64/110KV,127/220KV,290/550KV

□□□□□□□□□□□□ ≤800mm<sup>2</sup> □□□□□□□□□□□□ > 800mm<sup>2</sup> □□□

□□□□□□□□□□□□ ≥500mm<sup>2</sup> □□□□□□□□□□□

□□□ □□□□□□□□□□

□□□□□ □□□□□□□

□□□□□ □□□□□□□

□□□□□ □□□□□□□□□□□□□□; □□ □□□□□□□□□□□□

□□□ □□□□□□□

□□□□□□□ □□□□□ □□□□□□□□□□□□□□□□□

□□□□□□□ 240 ~ 3000sqmm

□□□□□□□ 90 °C □105 °C

□□□ □□□□□□□

□□□□□□□ YJLW02 YJLW03 □YJLLW02 YJLLW03

□□□□□ IEC 60840:1999

□□□□

□□□□□□□□□□□□ 90°C, □□□□□□□□ 105 °C □

□□□□□□□□□□□□□□□□ □□250 °C □










□□□□□□



3. 10mm 60mm





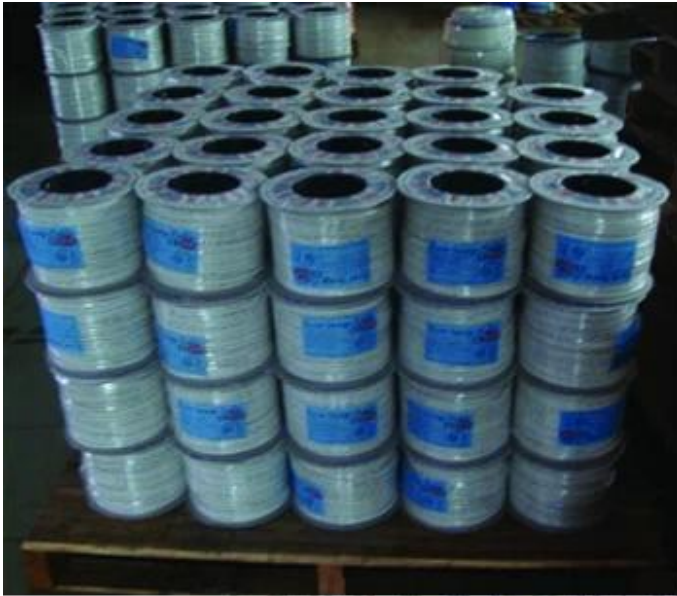

4. 圖 1 至 圖 8 展示了本廠生產的各種規格之鋼絞線及鋼筋之出貨流程及包裝方式。





□□□□□□□□ □□□□□□□□“□□□□”□□□