


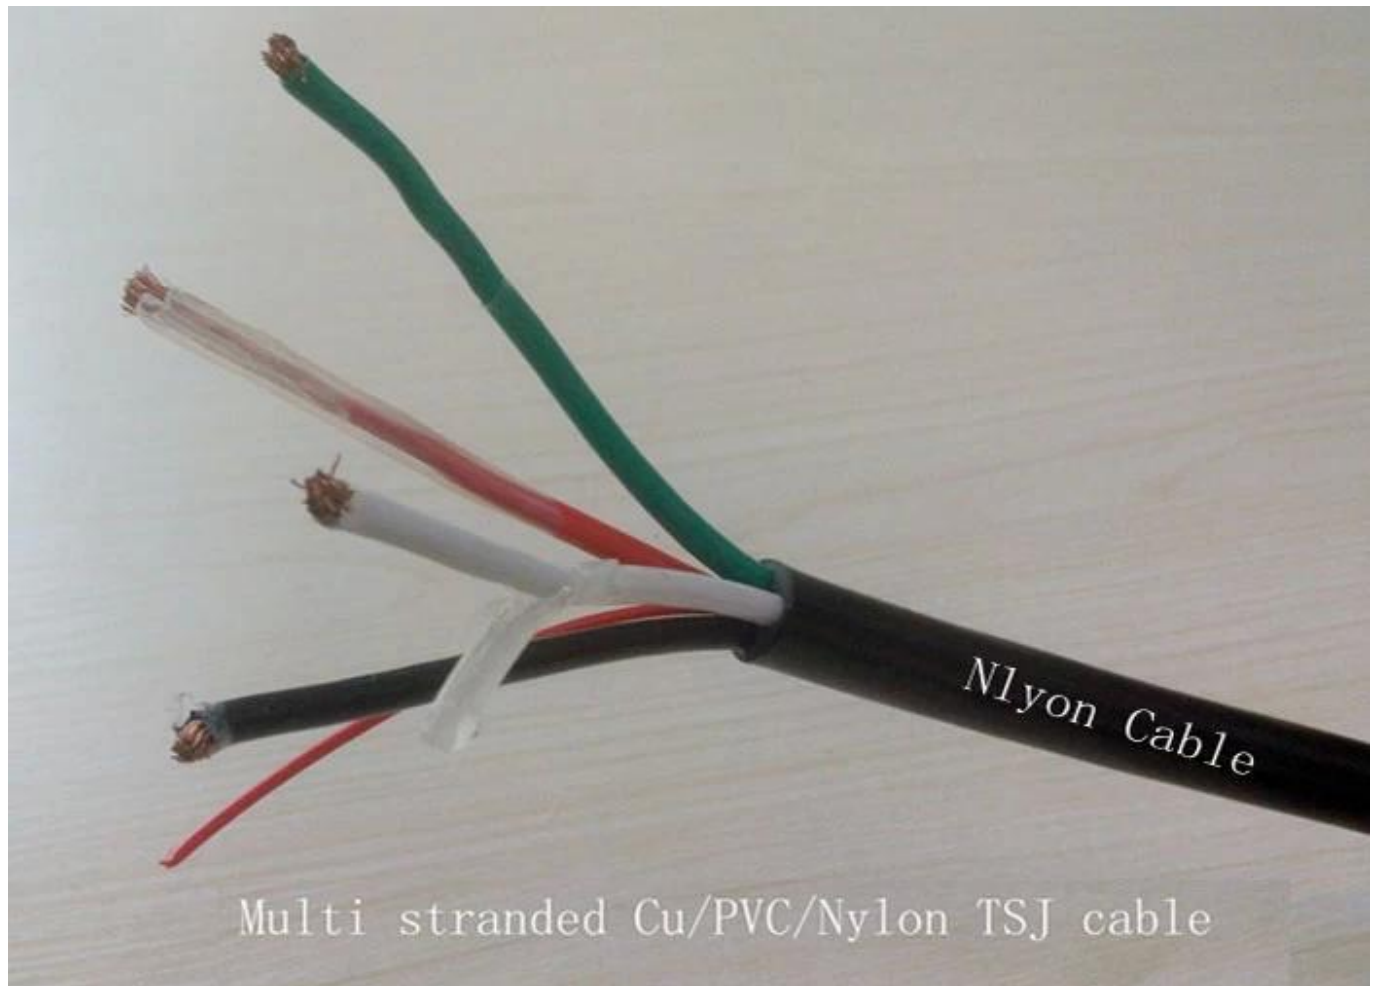

特點

額定電壓 300V

導體 銅絞線

規格 18AWG~10AWG

線徑 2~5mm

外皮 PVC

耐熱性 優異

耐油 耐酸

耐彎曲 100%可彎曲

耐溫度 105°C可長期使用

符合 UL62、CSA 22.2-49、JIS580-B、NEC400

用途

□□□□

AWG			s			Wt / Lbs / M Ft
SJT 18/2	2	16/30	0.030	0.287	10	50
SJT 18/3	3	16/30	0.030	0.315	10	55
SJT 16/3	3	26/30	0.030	0.330	13	75
SJT 16/4	4	26/30	0.030	0.365	10	85
SJT 14/3	3	41/30	0.045	0.365	18	90
SJT 14/4	4	41/30	0.045	0.405	15	115
SJT 12/3	3	65/30	0.045	0.430	25	135
SJT 12/4	4	65/30	0.045	0.475	20	170
10/3	3	104/30	0.045	0.580	30	215
SIT 10/4	4	104/30	0.045	0.640	25	275

Page 10

- 1.**






□□□□□□□□



3. 10 60 international ly





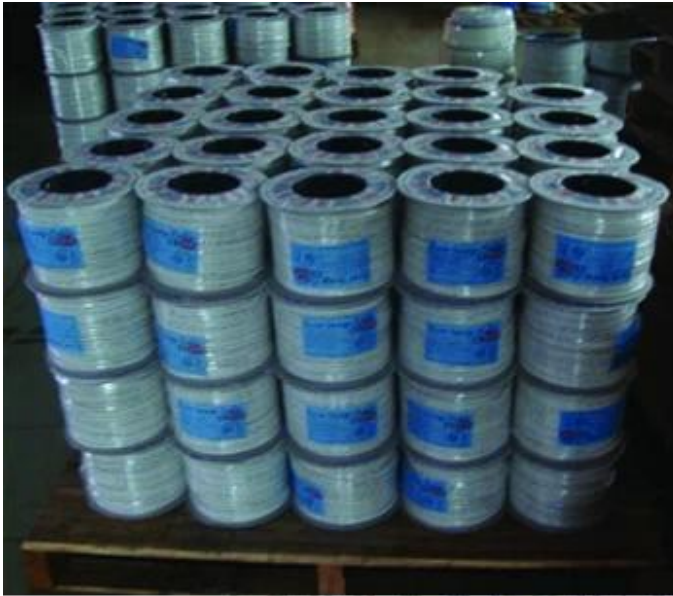

4. 本公司之產品，係由本公司自行生產，品質優良，價格低廉，歡迎各界人士垂詢。



5. 5월 10일 어린이날을 맞아 어린이들이 직접 참여하는 '어린이날 기념식'을 실시함

