


□□□□

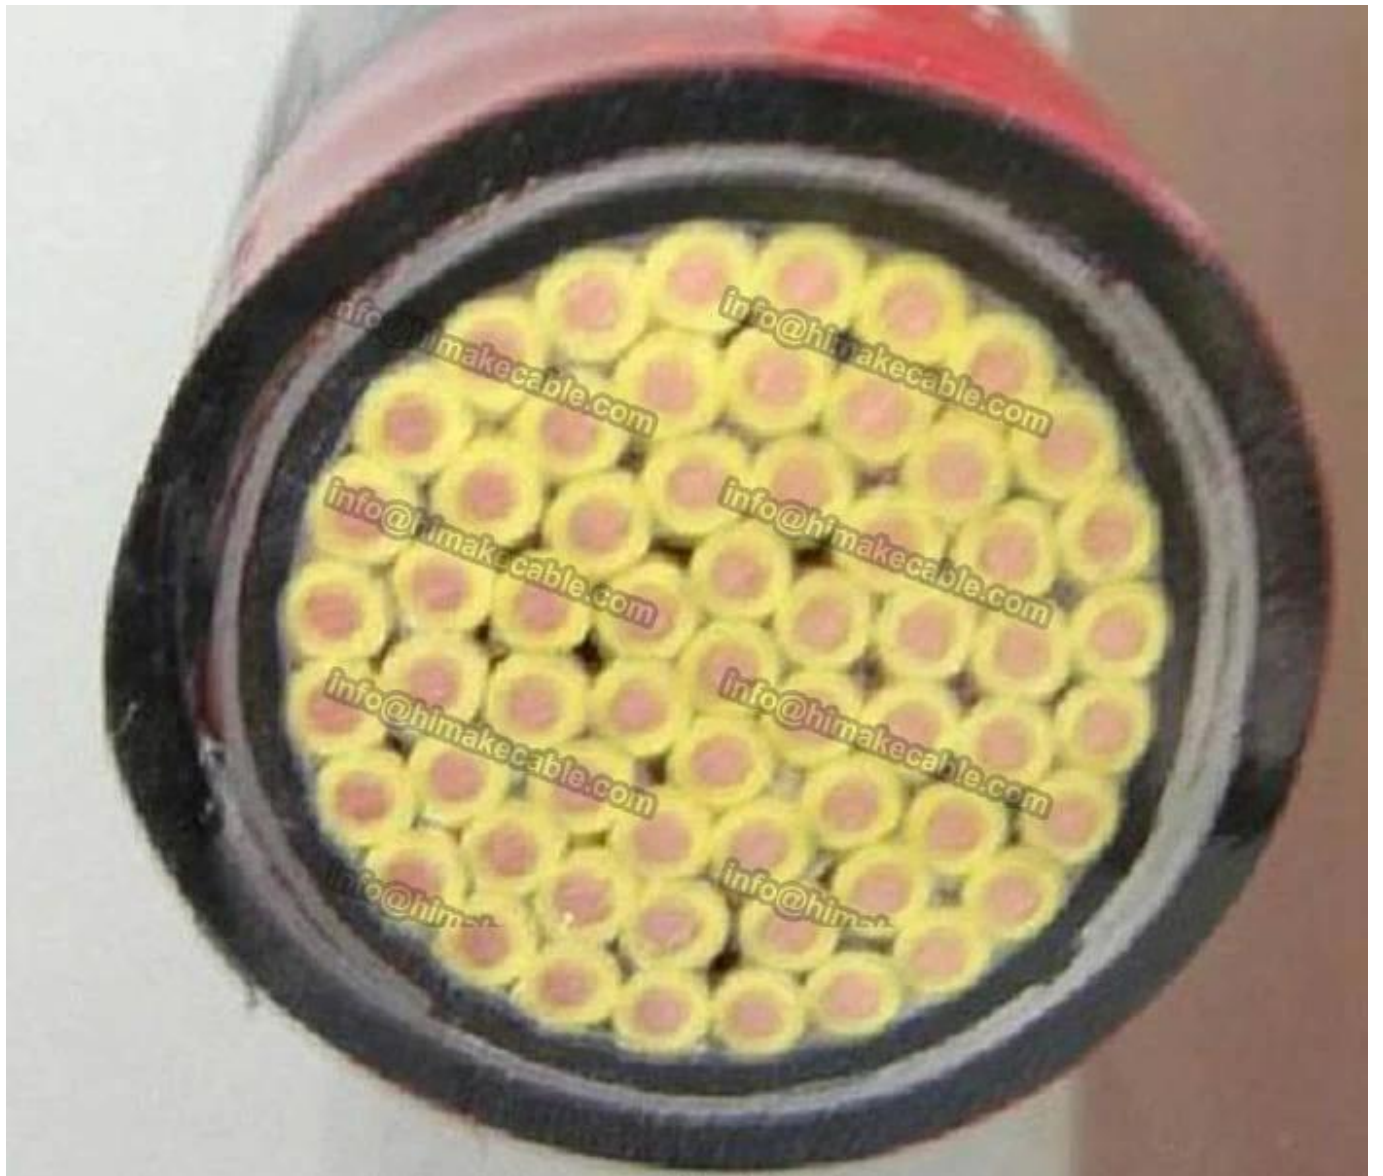

□□□□ 450 / 750V□0.6 / 1KV

□□□ 1□□□□2□□□□□□□□

□□□□□□□□ 0.75□10sqmm

□□□ PVC□□□PVC□Rohs □□PVC

□□□□□ □□5□□□□□□□□□□5□□□□□□□□□□□□□□□□□□□

□□□ □□□□

□□□ PVC□□□PVC□□□PVC

产品名称 阻燃聚氯乙烯护套电力电缆

额定电压 70°C 90°C

长度 100m

型号规格 KVV22, ZR-KVV22

执行标准 IEC60277 BS6500 VDE0250 GB / T9330 IEC60332

产品特点

本产品符合 RoHS 环保要求

技术参数

本产品适用于室内、室外、潮湿、腐蚀性环境中使用

规格表 450/750v 阻燃型

(详细规格表请参见 info@himakecable.com)

导体截面 (mm ²)	导体绝缘厚度 (mm)	导体绝缘耐压 (kV)	导体绝缘厚度 (mm)	导体绝缘耐压 (kV)	导体绝缘厚度 (mm)	导体绝缘耐压 (kV)	导体绝缘厚度 (mm)	导体绝缘耐压 (kV)
2 × 4	PVC/0.8	PVC/1.0	PVC/1.5	PVC/1.8	16.9	18.3	656	725
2 × 6	PVC/0.8	PVC/1.0	PVC/1.5	PVC/1.8	17.9	19.3	744	816
2 × 10	PVC/1.0	PVC/1.0	PVC/1.7	PVC/1.8	21.7	21.9	1019	1028
3 × 2.5	PVC/0.8	PVC/0.8	PVC/1.5	PVC/1.8	16.5	17.1	634	657
3 × 4	PVC/0.8	PVC/1.0	PVC/1.5	PVC/1.8	17.5	19	727	803

联系我们

1. 联系我们: info@himakecable.com



2. 〇〇〇〇〇〇 〇〇〇〇〇〇〇〇 〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇

〇〇〇〇




□□□□□□



3. 10 60





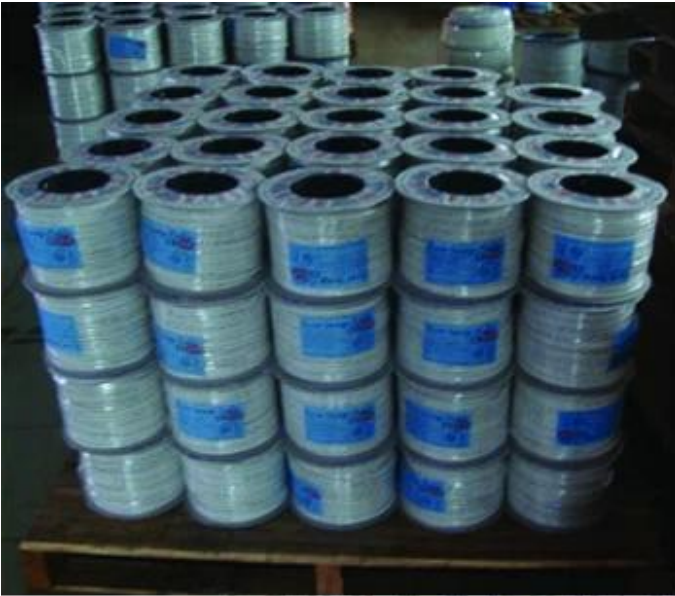

4. 圖中展示了各種材料（如線、鋼絲、紅線、木架）的存儲和運輸過程，包括在倉庫中堆疊、裝載到卡車以及裝入貨櫃。



