

□□□□:



- silicone jacket
- Green/Yellow wire
- Tinned copper conductor
- silicone insulation
- Polyester fiber braid



www.himakecable.com
info@himakecable.com

□□□□: 300/500V

□□: □□□□□□ □□□□, 5□□□□□□

□□: □□□

□□□□: 2C: □□ + □□, 3C: □□ + □□ + □□/□□, 4C: □□ + □□ + □□ + □□/□□, 5C: □□ + □□ + □ + □□ + □□/□□, □
HD308/UNE 21089-1

□□: □□□, H05SST-F □□□□□□□□

□□□□: □□□□, □□: □□□□□□□□□□□□□□□□ □□□□□□

□□: □□100□, □□□□, □□□□□□

□□□□: -60°C~180°C

TS HD 22.15.S1

TS HD 22.15.S1

TS HD 22.15.S1, TS HD 22.15.S1

TS HD 22.15.S1

TS HD 22.15.S1, TS HD 22.15.S1

TS HD 22.15.S1 (TS HD 22.15.S1: info@himakecable.com info@himakecable.com)

TS HD 22.15.S1 (TS HD 22.15.S1)	TS HD 22.15.S1 (TS HD 22.15.S1)	TS HD 22.15.S1 (mm)	TS HD 22.15.S1 (TS HD 22.15.S1)	TS HD 22.15.S1 (amp) TS HD 22.15.S1
2x0.75	0.6	0.8	6.2	5.4
2x1.0	0.6	0.9	6.7	7.0
2x1.5	0.8	1.0	7.9	9.4
2x2.5	0.9	1.1	9.3	12.2
3x0.75	0.6	0.9	6.8	5.1
3x1.0	0.6	0.9	7.1	6.7
3x1.5	0.8	1.0	8.4	9.0
3x2.5	0.9	1.1	9.9	11.6

TS HD 22.15.S1

1. TS HD 22.15.S1, TS HD 22.15.S1



2. 0000000 0000000 000000000000000000, 00000000000000

0000




□□□□□□



3. 10mm 60mm





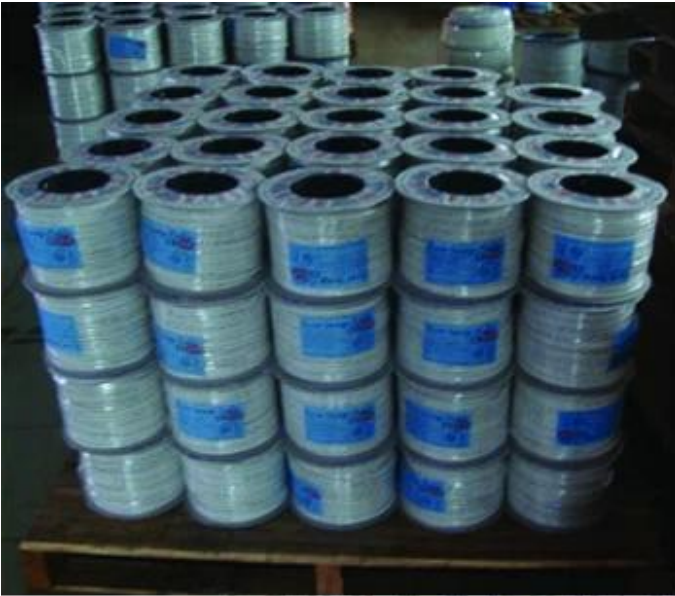

4. 圖 4-1 為 本 廠 之 電 纜 庫 房 內 之 電 纜 盤 架 及 電 纜 盤 架 之 裝 載 情 況 。



5. 〇〇〇〇〇〇〇〇 〇〇〇〇〇〇〇〇〇〇〇〇〇〇, 〇〇〇〇〇〇〇〇〇〇〇〇〇〇



