



额定电压 300/500V~450/750V

导体 5根绞合铜线

导体截面积 0.5 ~ 240sqmm

绝缘 PVC, 护套 PVC 或 PVC

额定温度 额定环境温度 额定电压 额定功率 额定电流

额定温度 70 °C~90 °C

额定 100 平方毫米

额定电压 H07V-K, RV~ZR-RV~H05V-K

额定电压 IEC60277~BS6500 VDE0281~GB/T 5023~IEC60332

□□□□

--	--	--

□□□□□

[illegible]

0000 (0000000000000000 info@himakecable.com)

[illegible]

□ □ □ □ □

1.






□□□□□□□□



3. 10mm 60mm



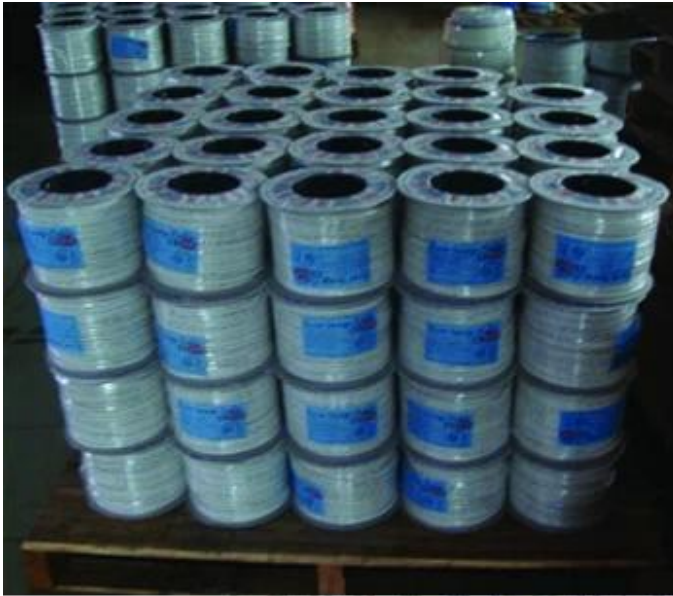

4.



