



00000 600V

00000000000000000000 IEC60228

00000000 18AWG 500Kcmil

000 TPE

000 2 0000

00000 000 000 000 00000000000000

00000000000000000000

000 TPE00000000 0000

000 000000000000000000 85%0000

0000 TPE

0000000 000000000000000000

00 000 EVE, EVT

100

90 °C 105 °C -40 °C

UL 62

FT2

FT2 (UL2556)

FT2

info@himakecable.com

Code	Configuration	Dimensions (mm)	Weight	Length
EVE	2 x 18AGW	16/0.254	2.8±0.1	9.8
EVE	2 x 12AGW	65/0.254	4.8±0.1	13.8
EVE	2 x 6AGW	266/0.254	8.4±0.2	23.4
EVE	3 x 18AGW	16/0.254	2.8±0.1	10.2
EVE	3 x 12AGW	65/0.254	4.8±0.1	15.0
EVE	3 x 10AGW	105/0.254	5.5±0.1	16.5
EVE	3 x 6AGW	266/0.254	8.4±0.2	24.8

1.

1.



2. 请写出下列各数的十进制表示。

1011




□□□□□□



3. 10 60



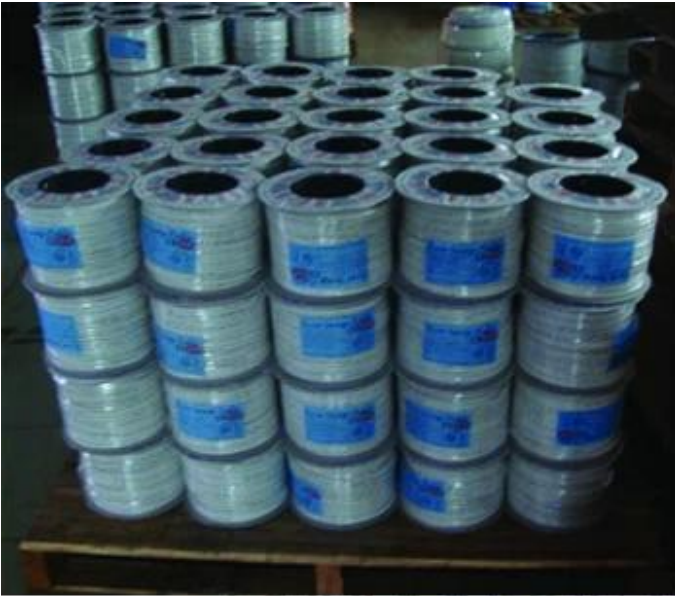

4. 圖 1-10 鋼 筋 卷 盤 的 裝 卸 及 運 送 圖 示



□□ □□□□□□ □□□□□□□□□□□□"□□□□".