

CATV

LAN

info@himakecable.com

Core Count	Outer Diameter (mm)	Weight (Kg/km)	Dimensions (mm)		Strength (N)		Max. Tension (N/1000 mm)	
			Core Diameter	Cladding	Core	Cladding	Core	Cladding
2-30	9.8	95	10 D	30%	1500	600	1000	300
32-36	10.3	115	10 D	30%	1500	600	1000	300
38-60	10.7	115	10 D	30%	1500	600	1000	300
62-72	11.3	140	10 D	30%	1500	600	1000	300
74-96	12.9	175	10 D	30%	1500	600	1000	300

Notes:

1. ...





Brand new material

- > Smooth
- > Anti-UV
- > Long-life

High Quality Fiber

- > Fast
- > Long and stability transmission
- > Low Attenuation.




High Quality PBT Loose Tube Material

- > Anti-aging
- > Good Protection

Fiber Optic Cable Production Process

- Fiber Testing
- Fiber Coloring based on Fiber Color Identification
- Fiber coating
- Fiber tubes stranding with center strength member
- Fiber cable jacketing outer sheath together with armored material
- Finished fiber optic cable reeled in fumigated wooden dru

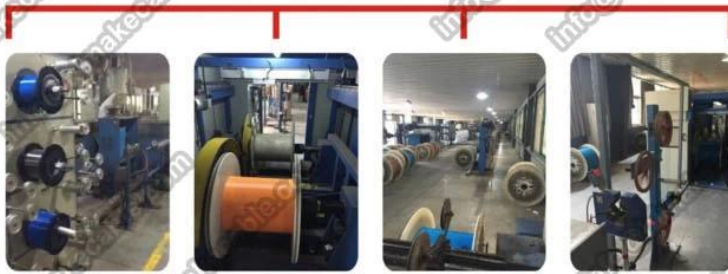

ADVANCED PRODUCTION EQUIPMENT

Advanced Production Equipments can guarantee qualified product.



Optic Fiber Cable Testing

- Fiber Testing
- Testing after fiber coloring
- Testing after fiber stranding
- Testing after fiber optic cable jacketing



