


□□□□□:

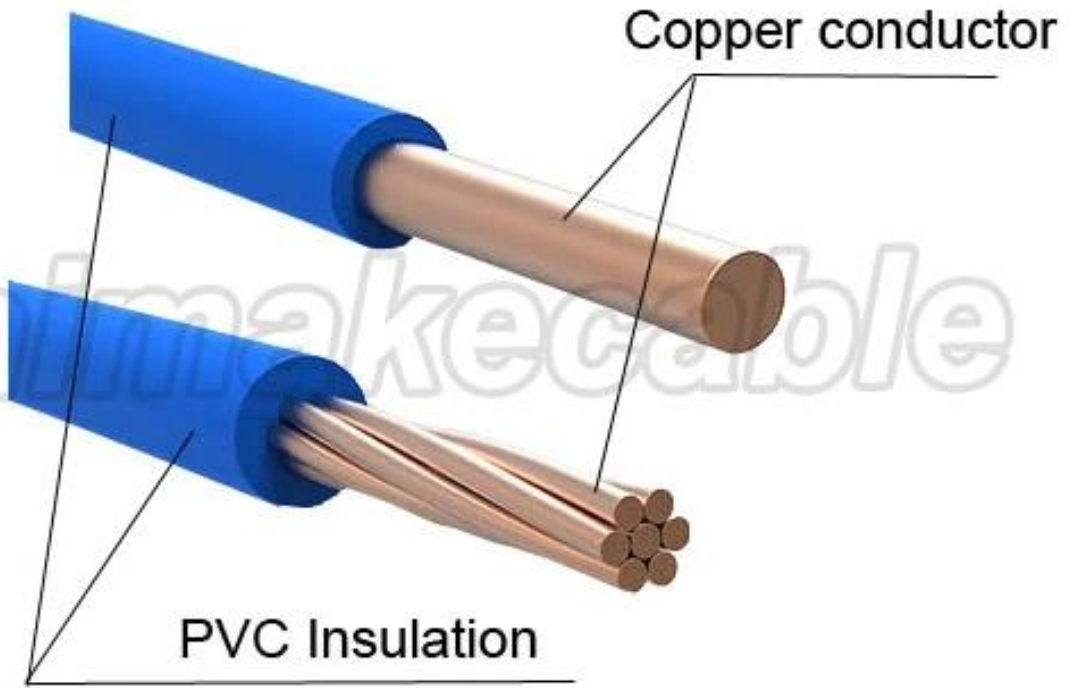

www.himakecable.com
info@himakecable.com

□□□□: 600 V

□□: □□□□□□ □□□□□□

□□□: PVC 75°C □□□

□□□□□: □□□□□□□□ □□□□□□□□□□

□□□□□: 100 m □□□□□□□□ □□□□□□□□□□

Max□□□□□□ 75°C

□□: ASTM B3□ASTM B8□UL83□UL1581

THW 14 AWG 1000 Kcmil (MCM) 75°C

THW 14 AWG 1000 Kcmil (MCM) 75°C

THW 14 AWG 1000 Kcmil (MCM) 75°C

THW 14 AWG 1000 Kcmil (MCM) 75°C

AWG	Strands	Strand Dia (mm)	Strand Dia (mm)	Strand Dia (mm)	Weight (kg/km)	Length (m)
14	1	0.76	4.3	17	33	100 m
12	1	0.76	4.8	19	47	100 m
10	1	0.76	5.4	22	68	100 m
8	1	1.14	6.1	24	100	100 m
6	1	1.52	7	28	151	100 m
14	7	0.76	4.5	18	36	100 m
12	7	0.76	5.1	20	50	100 m
10	7	0.76	5.8	23	73	100 m
8	7	1.14	7.4	30	118	100 m
6	7	1.52	8.5	34	174	100 m
4	7	1.52	9.8	39	256	100 m
2	7	2.03	11.3	45	391	100 m
1	19	2.03	13.5	54	505	1000 m
1/0	19	2.03	14.6	58	622	1000 m

THW 14 AWG 1000 Kcmil (MCM) 75°C

- THW 14 AWG 1000 Kcmil (MCM) 75°C





□□□□□□



3. 10 60 internationally





