


□□□□□:

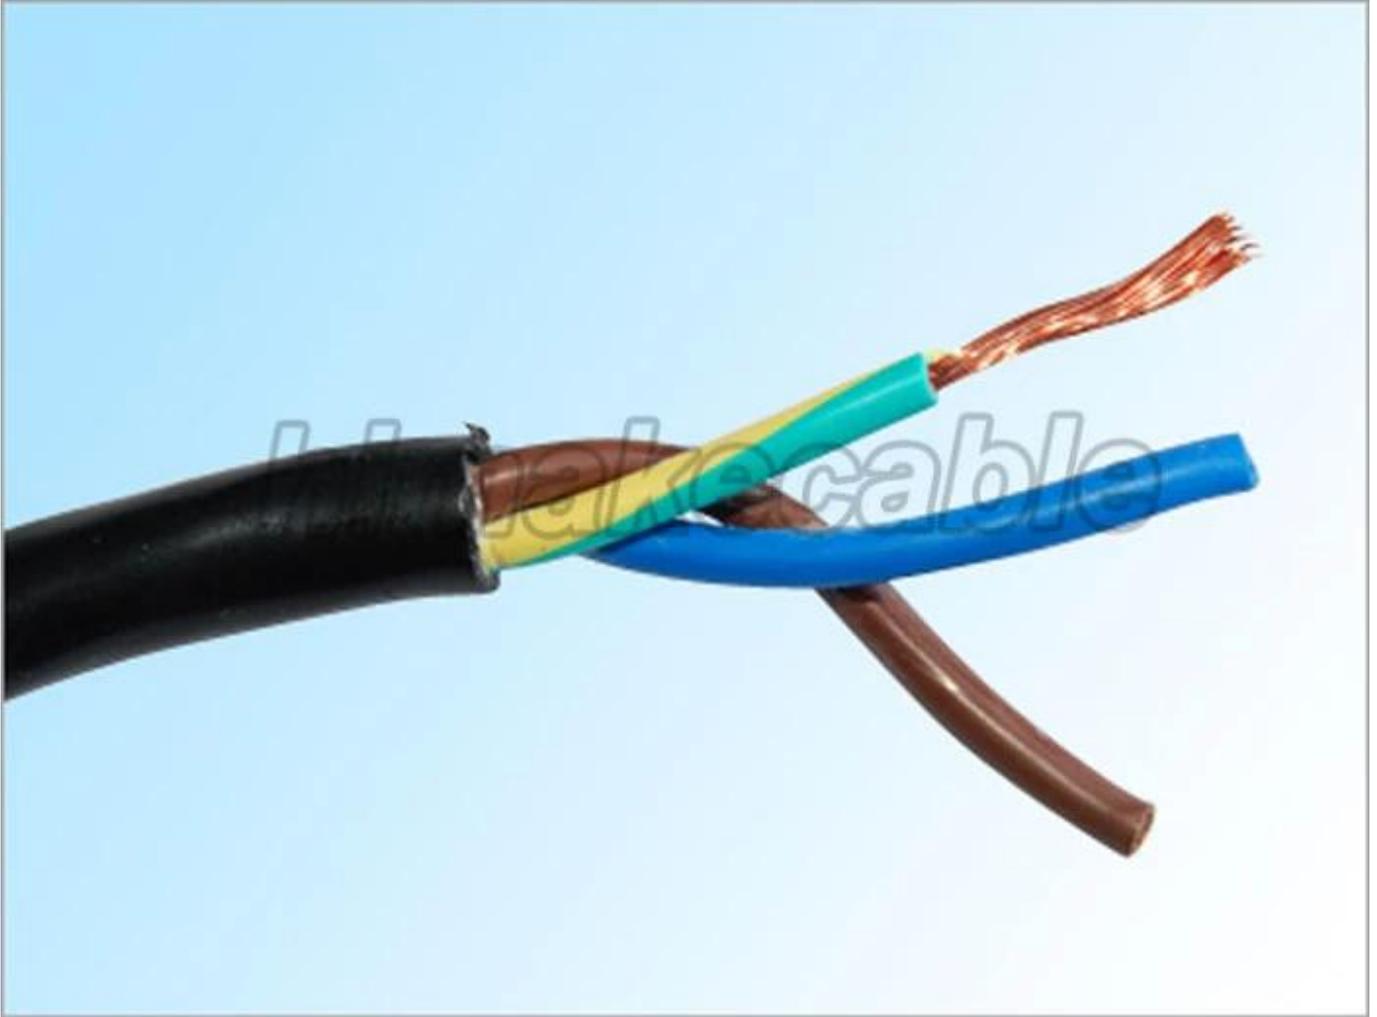

□□□□: 300/500v

□□: □□□5□□□□□□□□□□□□□□□□

□□□□□□□□: 0.5 ~ 6.0 sqmm

□□: □□□□LSZH□LSOH

□□□: □□□, □□□□, □□□, □□□□□□/□□□□□□□□□□□□□□□□

□□: 2 ~ 5 □□

□□□: LSZH□LSOH

□□□□□□□□: □□□□□□□□□□□□□□□□□

□□.□□□□□: 90°C, 110°C, 125°C, 150°C

□□□□□□: 1□□□□□□□□100□□□□□□□□□□ □□

Model: H05ZZ-f H07ZZ

Standards: BS7211 IEC60332 IEC61034 IEC60754 hd 22.9 VDE0282 GB/T19666

**Features:**

Compliant with CE, RoHS, REACH, and other international standards. Suitable for indoor and outdoor use.

**Technical Specifications:**

Available in various conductor sizes and jacket thicknesses.

**Contact Information:** (Email: [info@himakecable.com](mailto:info@himakecable.com))

Conductor Size (mm <sup>2</sup> )	Number of Conductors	Inner Jacket (mm)	Outer Jacket (mm)	Overall Diameter (mm)	Weight (kg/100m)	Resistance (mΩ/km)
2x0.75	5	PVC/0.6	PVC/0.8	7.6	49.24	0.011
2x1	5	PVC/0.6	PVC/0.8	8	56.59	0.01
2x1.5	5	PVC/0.7	PVC/0.8	9	74.6	0.01
3x0.75	5	PVC/0.6	PVC/0.8	8	61.23	0.011
3x1	5	PVC/0.6	PVC/0.8	8.4	71.27	0.01
3x1.5	5	PVC/0.7	PVC/0.9	9.8	99.3	0.01
3x2.5	5	PVC/0.8	PVC/1.1	12	150.53	0.009
4x0.75	5	PVC/0.6	PVC/0.8	8.6	75.12	0.011
4x1	5	PVC/0.6	PVC/0.9	9.4	91.72	0.01
4x1.5	5	PVC/0.7	PVC/1.0	11	127.54	0.01
4x2.5	5	PVC/0.8	PVC/1.1	13	187.6	0.009

**Notes:**

1. All dimensions are in millimeters unless otherwise specified.








□□□□□□



3. 10 60 international

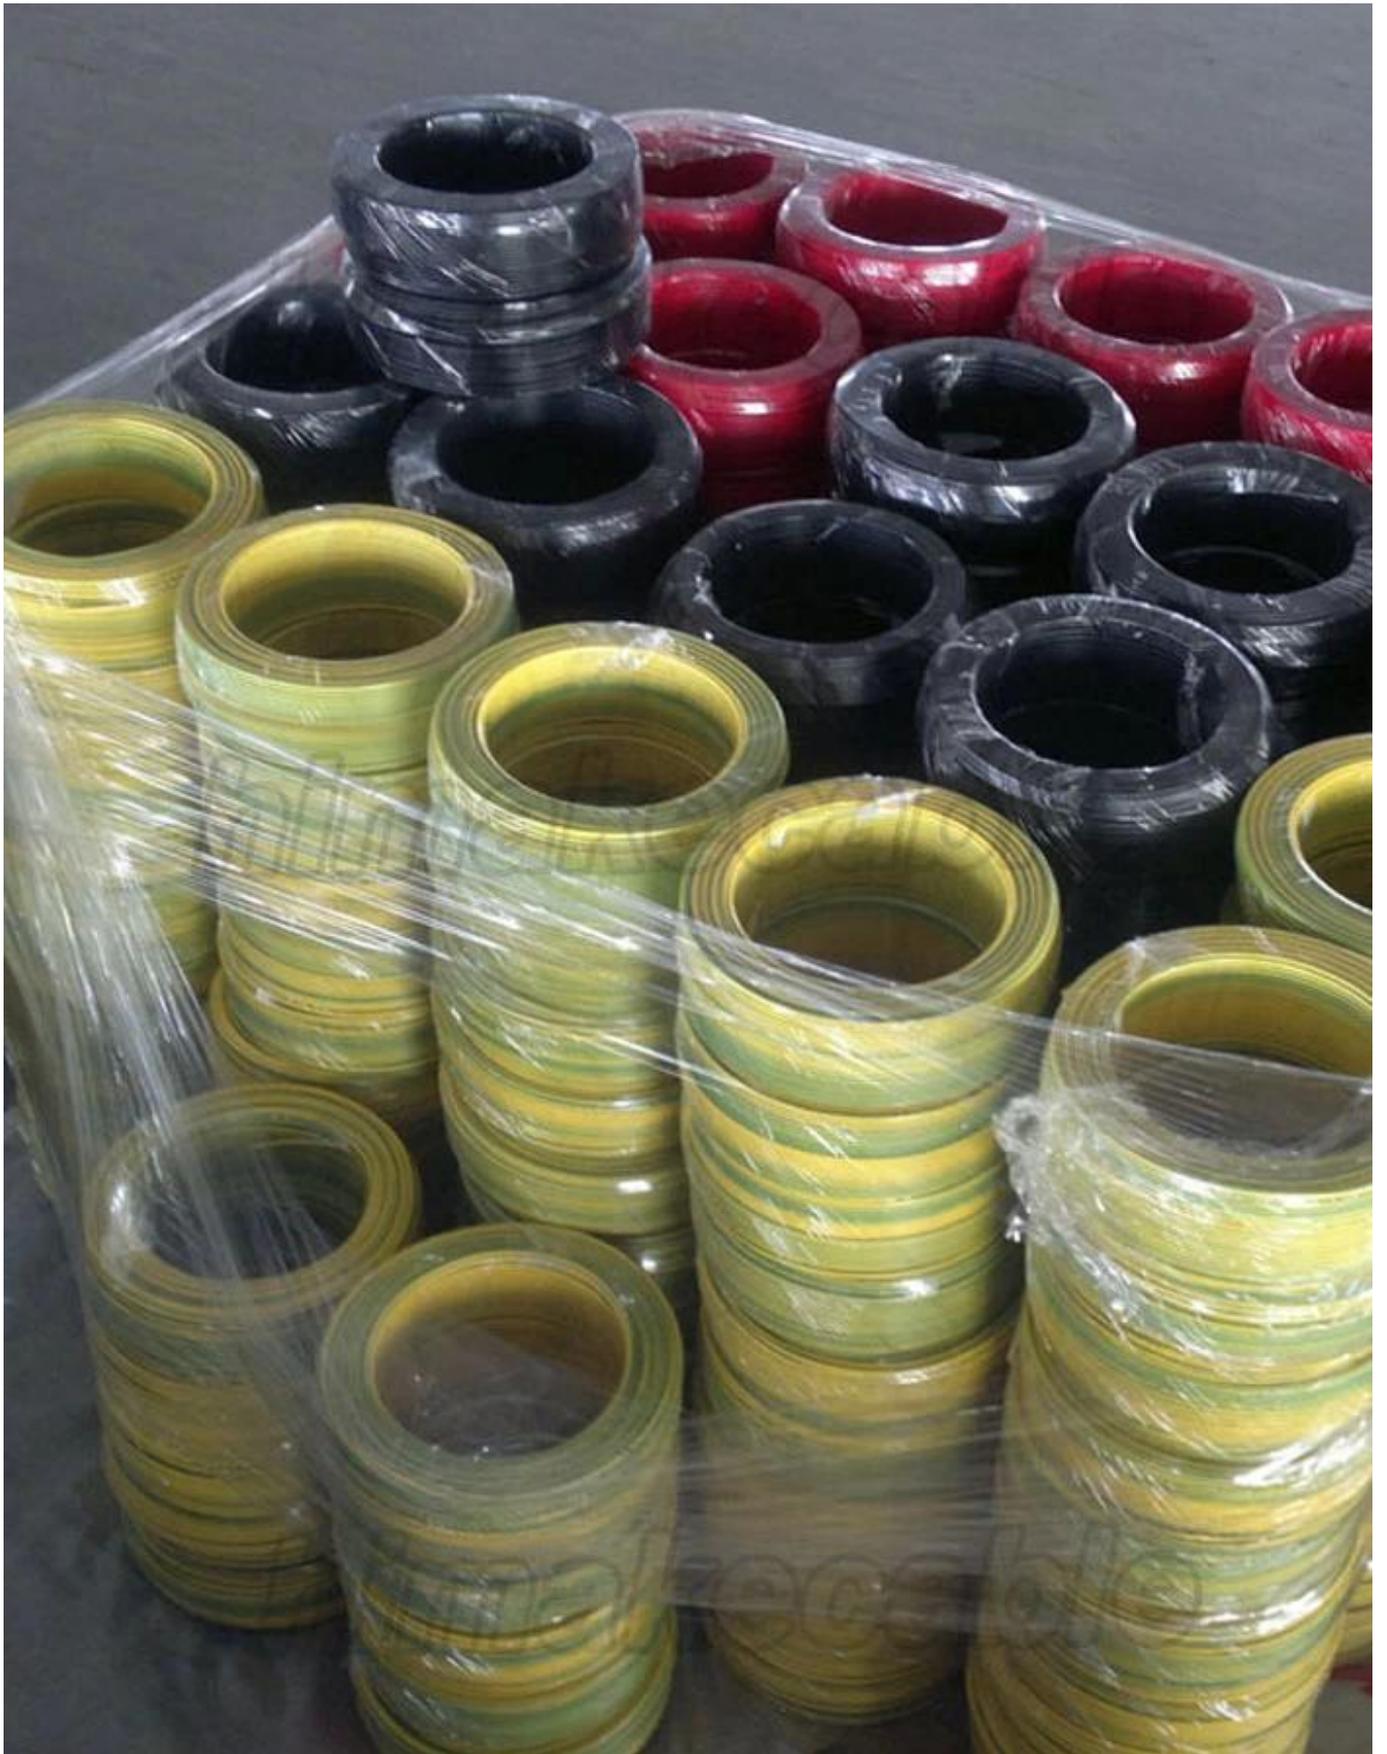

4. international

5. 責任感 **responsibility**



