

□□□□:



□□□□□□□□□□ FTP Cat6 □ LAN □□□□□□□□□□□□□□□□□□□□□□□□1□□□□!

□□: CCS + cca/cca/CCU/BC

線径: 0.57 mm 23AWG

□□□ □□: 4 ~ 25 □

□□: PE□HDPE

000: 4000: 0000;0/0-0; 0000/0000-0000;0000/00000000c00000000 ANSI/TIA/EIA-568-B 0000000000

[illegible]

□□□: □□□ PVC Rohs □□□ LSZH □□□

□□□□□□: □□□□□□□□□1 □□

□□□□: 1000□□□□□□ 1□□□□305□□□□ □□

□□□□□□: ftp Cat6□HSYVP6□HSYYP6□ HSYZP6

□□□□: ISO/IEC11801, IEC61156-2, □□□/T1019-2001, ANSI/TIA/EIA-568B, UL444

特 性:

UV 線に RoHS 対応;環境にやさしい材料を使用 FEXT 特性に優れている;低 CCS + cca/cca/CCU/BC 低 HDP/PE 低 FRPVC/LSOH PVC 低材料使用率 環境にやさしい材料を使用

適用範囲:


最大伝送帯域 250MHz 最大伝送距離 100m 最大伝送速度 10base-t-T/ISDN 4.10 mbps 100base-t-T (IEEE 802.3) 1Gbps 100base-t-T (IEEE 802.3) 100Mbps TP-PMD 100base-tx-T4/TX (IEEE 802.3) 100VG-AnyLAN 1000base-t-T 1000base-t-TX 155Mbps ATM 622Mbps ATM.

お問い合わせ: (Eメール: info@himakecable.com)


品名 description	Nominal 径 (mm)	外径 径 (mm)	Insulation 厚 (mm)	線径 (mm)	重量 (g/m)
6 FTP 線	4x2x 0.57 (23AWG)	1/0.57	1.02	7.1	46
6 FTP LSZH	4x2x 0.57 (23AWG)	1/0.57	1.02	7.1	48




CAT5e UTP Bulk Cable

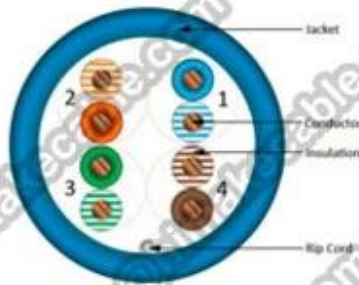

CAT6 UTP Bulk Cable

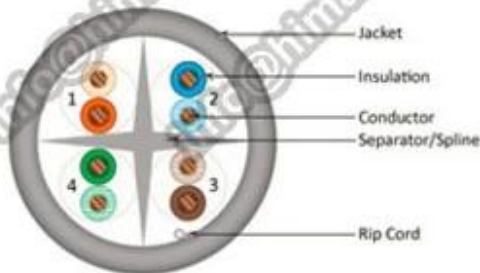

CAT6A UTP Bulk Cable

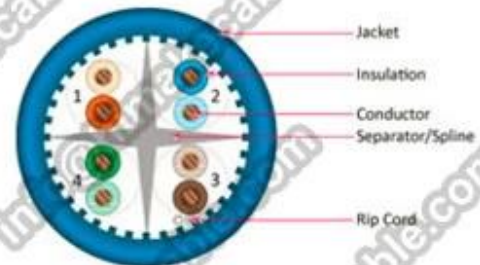

Packaging & Shipping



305m/pull out box



colour pull out box



2boxes in carton



305m/wooden reel



1000ft/wooden reel



305m wooden reel in carton



warehouse



warehouse



shipment