

คุณสมบัติ:

Compliant with RoHS; Halogen-free; FEXT; CCS + CCA/CCA/CCU/BC; HDP/PE; LSOH/FRPVC PVC; Low smoke; Low halogen

คุณสมบัติเพิ่มเติม:


Supports 100 MHz; Supports IEEE 802.5 T4/100 BASE-TX; Supports 100 Vg-AnyLAN 1000 BASE-T; Supports 1000 Mbps; Supports ATM 52/155 Mbps; Supports 622 Mbps

Packaging: (Contact us at: info@himakecable.com)

Description	Outer Diameter (mm)	Strand Diameter (mm)	Overall Diameter (mm)	Weight (mm)	Weight (Kg/km)
Cat.6 FTP PVC	4x2x0.57(23AWG)	1/0.57	1.02	7.1	46
Cat.6 FTP LSZH	4x2x0.57(23AWG)	1/0.57	1.02	7.1	48



CAT5e UTP Bulk Cable

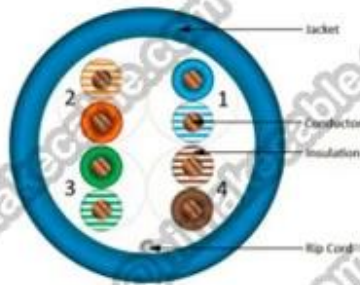

CAT6 UTP Bulk Cable



CAT6A UTP Bulk Cable



Packaging & Shipping

