


□□□□□:

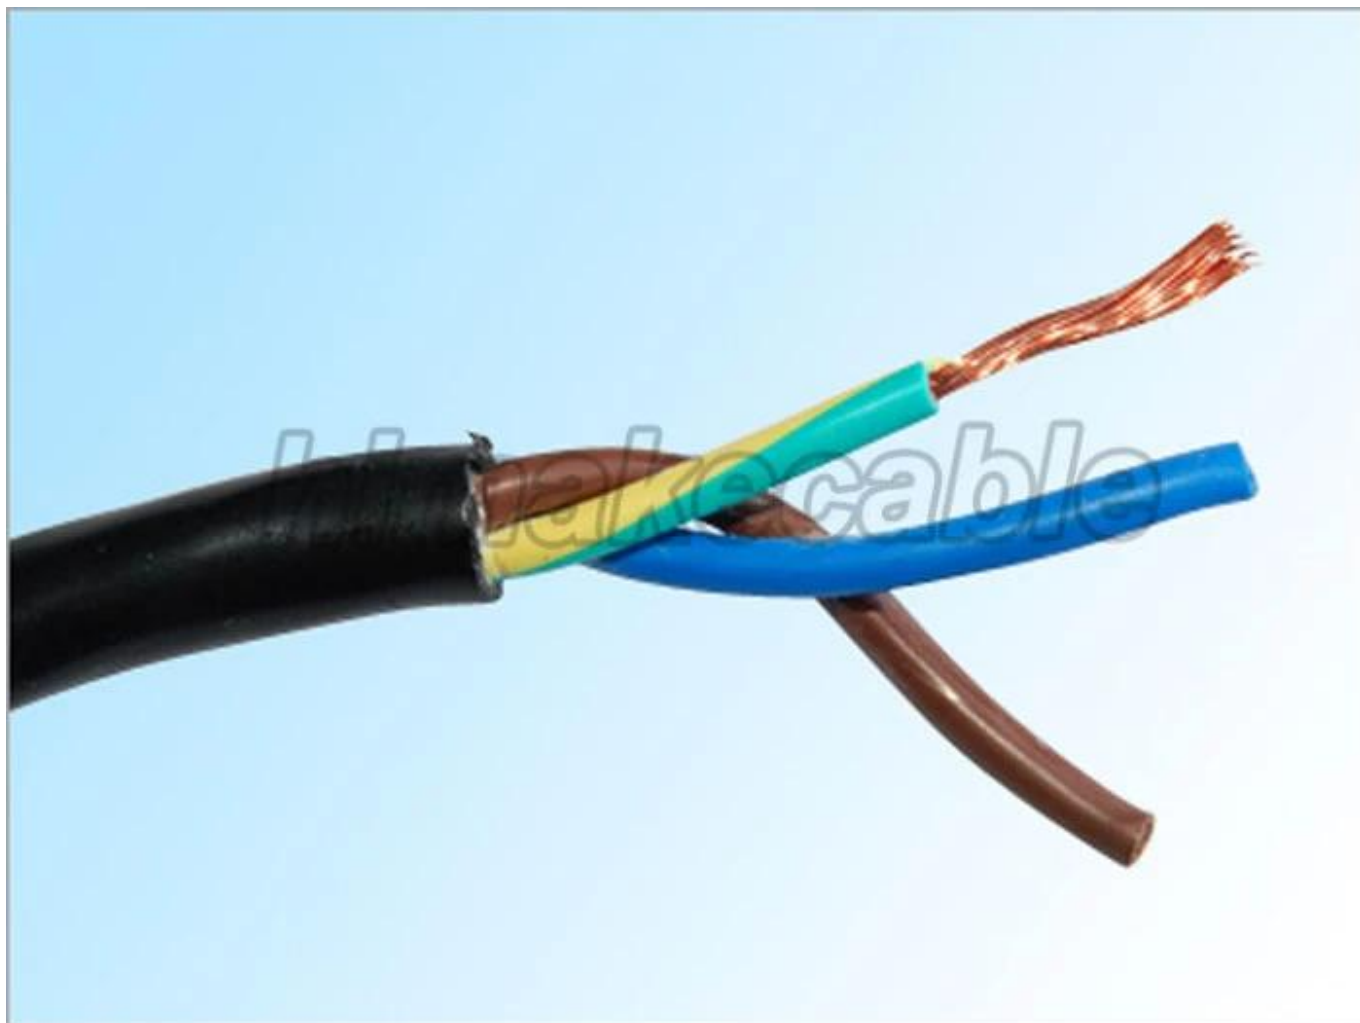

□□□□: 300/500 V

□□: □□ 5 □□□□□□□□

□□□□□□: 0.5 □ 25sqmm

□□□: XLPE LSZH□LSOH

□□□□□: □□□□□□□□□□□□ □□□□□/□□□□□□□

□: LSZH□LSOH

□□□□□: □□□□□□□□□□□□□□□□

Max□□□□□□ 90□ 110□ 125°C□ 150

□□□□□: 100 m □□□□□□□□□□□□□□ □□

□□□□□□□: RYJY□WDZ RYJY□H05ZZ F□H07ZZ F

标准: BS7211, IEC60332, IEC61034, IEC60754, HD22.9, VDE0282, GB/T19666

品牌:

符合标准: 符合 CE 认证, 符合 RoHS 标准, 符合 REACH 标准

产品描述:

规格: 5 芯, 聚氯乙烯 (PVC) 护套, 阻燃

联系方式: (电子邮箱: info@himakecable.com)

导体截面积 (mm ²)	芯数	导体材料 (mm)	绝缘材料 (mm)	护套厚度 (mm)	重量 (kg/km)	绝缘电阻 (MΩ.km)
2 × 0.75	5	PVC/0.6	PVC/0.8	7.6	49.24	0.011
2 × 1	5	PVC/0.6	PVC/0.8	8	56.59	0.01
2 × 1.5	5	PVC/0.7	PVC/0.8	9	74.6	0.01
3 × 0.75	5	PVC/0.6	PVC/0.8	8	61.23	0.011
3 × 1	5	PVC/0.6	PVC/0.8	8.4	71.27	0.01
3 × 1.5	5	PVC/0.7	PVC/0.9	9.8	99.3	0.01
3 × 2.5	5	PVC/0.8	PVC/1.1	12	150.53	0.009
4 × 0.75	5	PVC/0.6	PVC/0.8	8.6	75.12	0.011
4 × 1	5	PVC/0.6	PVC/0.9	9.4	91.72	0.01
4 × 1.5	5	PVC/0.7	PVC/1.0	11	127.54	0.01
4 × 2.5	5	PVC/0.8	PVC/1.1	13	1,876	0.009

备注:

1. 本产品为阻燃型, 符合 CE 认证, 符合 RoHS 标准, 符合 REACH 标准



2 下列各句，其句意與「吾嘗心服而不敢言」最接近的是：

（A）吾嘗心服而不敢言



□□□□□□



3. 10 60 internationally







_____".

