


□□□□□:

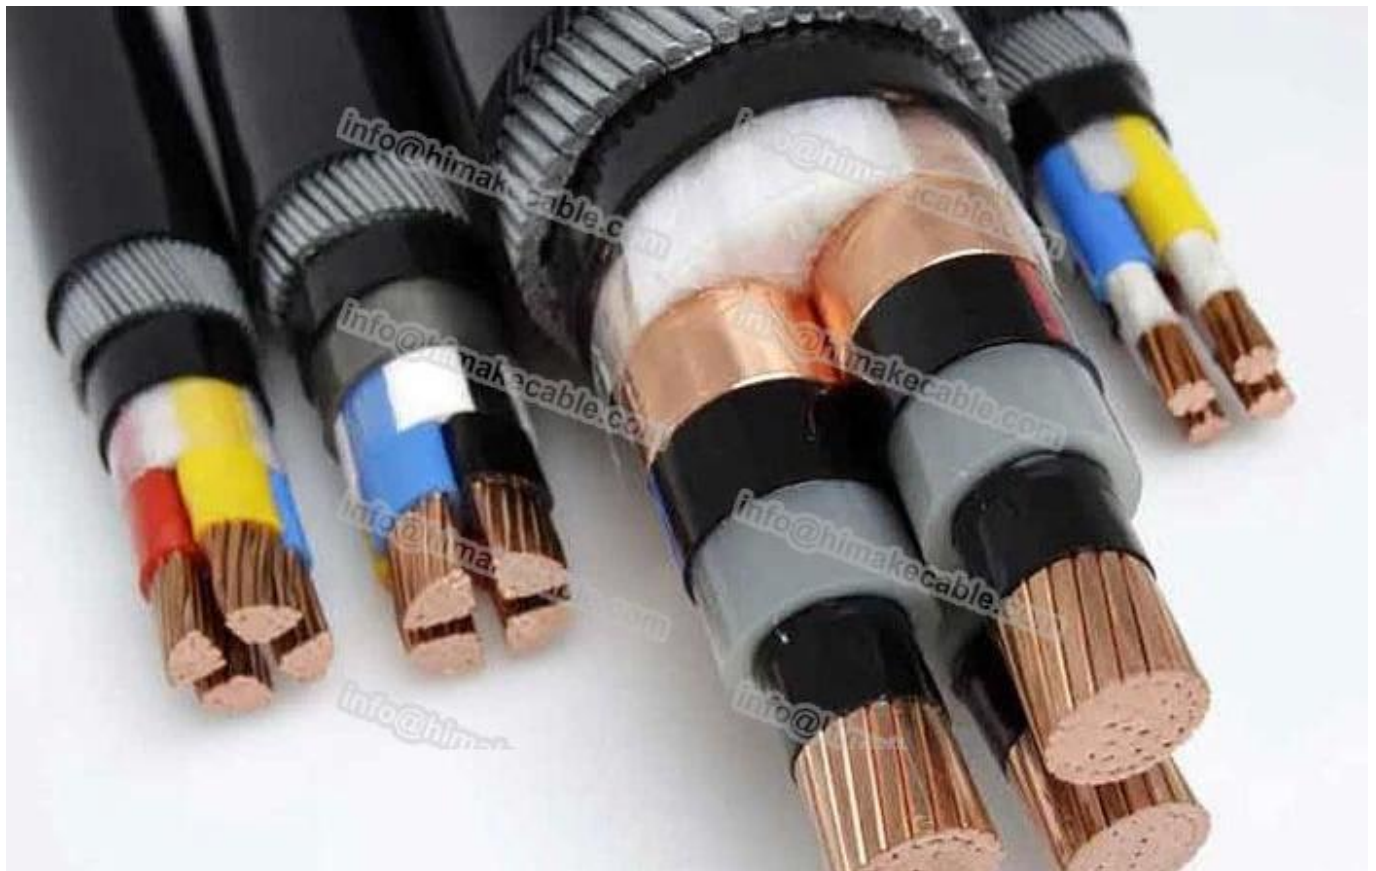

□□□□: 3.6/6KV,6/6KV,6/10KV,8.7/10KV,8.7/15KV,12/20KV,18/30KV,21/35KV,26/35KV

□□: □□ 2 □□□□□□□□□□□□□□□□

□□□□□□: 25 □ 1000sqmm

□□□: □□□□□□□□

□□□□□: 1 C: □□□□3 C: □ + □ + □□ □□□□□□□□

□□□□: □□□□□□□□□□□□ + □□□□□□ + □□□□□□□□

□□□□□: □□□□

□: LSZH□PE LSOH

□□□□□: □□□□□□□□□□

Max□□□□□□ 90

□□□□□: □□□□□□□□□□□□

□□□□□□□: YJV32□ZR YJV32

IEC60502 BS6622 VDE0276 GB/T12706 IEC60332

品牌:

符合 RoHS 环保要求

规格:

规格 26/35 符合 IEC60502 BS6622 VDE0276 GB/T12706 IEC60332 标准

联系我们: (邮箱: info@himakecable.com)

导体截面积 (mm ²)	XLPE 绝缘厚度 (mm)	总外径 (mm)	重量 (A) (kg/km)	重量 (B) (kg/km)	重量 (Kg/Km)
3 x 25	4.5	53.8	128	155	4821
3 x 35	4.5	56.2	155	185	5366
3 x 50	4.5	59.4	185	219	6156
3 x 70	4.5	63.2	230	268	7096
3 x 95	4.5	67.3	276	320	8265
3 x 120	4.5	70.7	316	362	9312
3 x 150	4.5	75.6	358	407	11445
3 x 185	4.5	79.5	409	460	12910
3 x 240	4.5	84.8	482	535	15220
3 x 300	4.5	90.2	546	601	17581
3 x 400	4.5	100.2	647	695	21722

备注:

1. 符合 IEC60502 BS6622 VDE0276 GB/T12706 IEC60332 标准





□□□□□□



3. 10 60 internationally





