


□□□□:

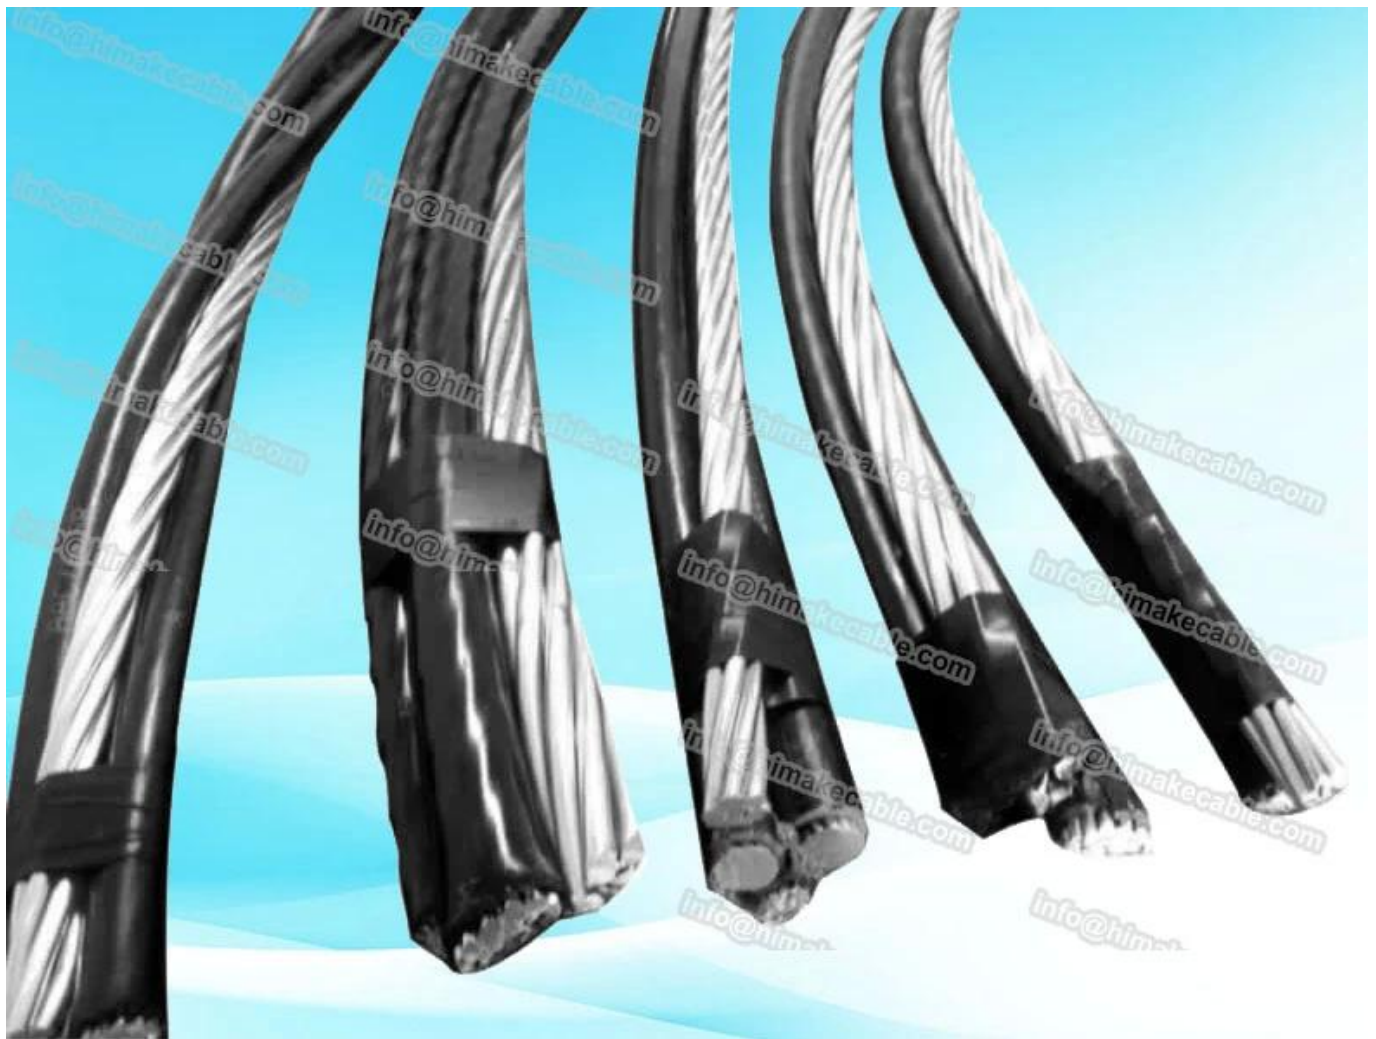

□□: □□□□□□□□ □□□□□ 1350 H19 □□□

□□□: 3 C

□□□□□□: PE □□□□□□□□□□ □□□

□□□: □□□ AAC□ACSR□ AAAC □□□□ □□□ □□□□6201 □□□□□□□□□□□□

□□□□□□: 1 C

□□□□□□□□: □□□□□□□□□□

□□□□□□: □□□□□□□□□□□□ □□

□□: ASTM B 230 B-231□B-232 B-399□ICEA S-76-474

特性:

このケーブルは、絶縁材料としてXLPEを使用し、75°Cの長期使用温度と90°Cの短時間使用温度を保持し、600Vの電圧（3相）に耐え、

規格:

このケーブルは6201 ASTM B 399 鋼線 ACSR 6/1 を採用しています。

このケーブルは75°Cの長期使用温度と40°Cの短期使用温度に耐えます。

このケーブルは500メートルの長さで提供されています。

このケーブルは、標準的なケーブル仕様です。

このケーブルは、標準的なケーブル仕様です。

お問い合わせ先: (お問い合わせ先: info@himakecable.com)

(ACSR ケーブル仕様表)

ケーブル名	銅線径 AWG	XLPE 径 (mm)	銅線径 AWG	重量 (kg)	重量 (kg/km)	電流 (A)
Morochuca	6	1.14	6-6/1	540	229	78
ケーブル	6-7	1.14	6-6/1	540	237	78
ケーブル	4	1.14	4-6/1	844	344	103
ケーブル	4-7	1.14	4-6/1	844	25 W	103
ケーブル	2-7	1.14	2-6/1	1293	557	136
ケーブル	1-19	1.52	1-6/1	1610	699	158
ケーブル	1/0-7	1.52	1/0-6/1	1987	859	182
ケーブル	1/0-19	1.52	1/0-6/1	1987	862	182
Chicoteagues	2/0-7	1.52	2/0-6/1	2404	1060	210
Grullo	2/0-19	1.52	2/0-6/1	2404	1063	210

お問い合わせ先:

- お問い合わせ先: info@himakecable.com




□□□□□□



3. 10 60 internationally



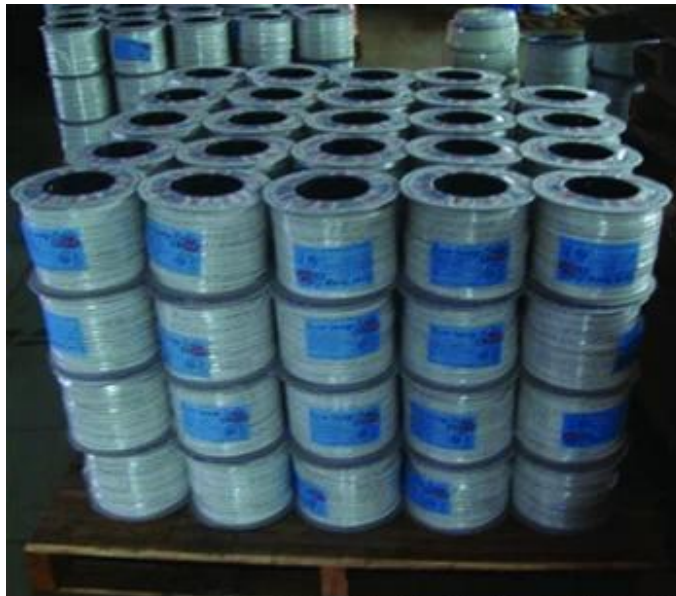

4. 〇〇〇〇〇〇〇〇〇〇〇 〇〇〇〇 〇〇〇 〇〇〇〇〇 〇〇〇〇〇〇〇〇〇〇 〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇〇



