


□□□□□:

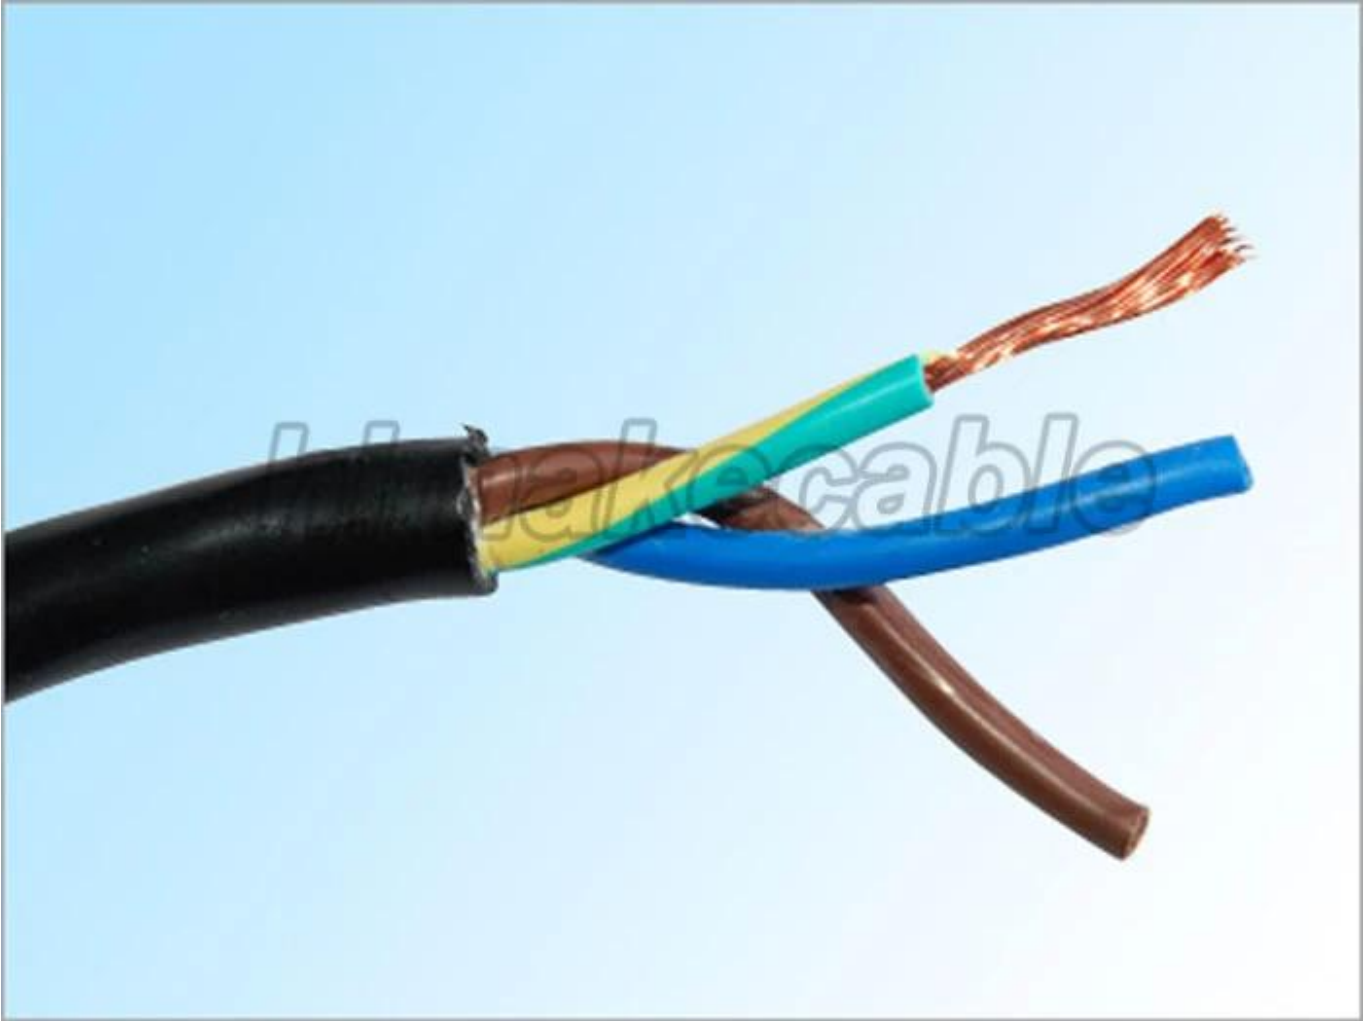

□□□□: 300/500 V

□□: □□ 5 □□□□□□□□

□□□□□□□: 0.5 □ 25sqmm

□□□: Rohs □□ PVC □□□□

□□□□□: □□□□□□□□□□□□ □□□□□/□□□□□□□□

□: □□□□□Rohs □□ PVC

□□□□□: □□□□□□□□□□□□□□□□

**Max**□□□□□□ 70□90

□□□□□: 100 m □□□□□□□□□□□□□□ □□

□□□□□□□: □ RVV ZR □ RVV□H05VV F□H07VV F

標準: IEC60277 BS6500 VDE0281 GB/T IEC60332 5023

**規格:**

標準規格に準拠し、RoHS 対応製品です。

**お問い合わせ:**

お問い合わせ先: 株式会社ヒマケケーブル

**お問い合わせ先:** (Eメール: [info@himakecable.com](mailto:info@himakecable.com))

断面積 (mm <sup>2</sup> )	芯数	外皮径 (mm)	内径 (mm)	外径 (mm)	重量 (kg/km)	絶縁抵抗 (MΩ.km)
2 × 0.75	5	PVC/0.6	PVC/0.8	7.6	49.24	0.011
2 × 1	5	PVC/0.6	PVC/0.8	8	56.59	0.01
2 × 1.5	5	PVC/0.7	PVC/0.8	9	74.6	0.01
3 × 0.75	5	PVC/0.6	PVC/0.8	8	61.23	0.011
3 × 1	5	PVC/0.6	PVC/0.8	8.4	71.27	0.01
3 × 1.5	5	PVC/0.7	PVC/0.9	9.8	99.3	0.01
3 × 2.5	5	PVC/0.8	PVC/1.1	12	150.53	0.009
4 × 0.75	5	PVC/0.6	PVC/0.8	8.6	75.12	0.011
4 × 1	5	PVC/0.6	PVC/0.9	9.4	91.72	0.01
4 × 1.5	5	PVC/0.7	PVC/1.0	11	127.54	0.01
4 × 2.5	5	PVC/0.8	PVC/1.1	13	1,876	0.009

**注意事項:**

1. 本ケーブルは、特定の用途にのみ適しています。



2 下列各句，没有语病的一项是

□□□□



□□□□□□



3. 10 60 internationally











