


□□□□□:

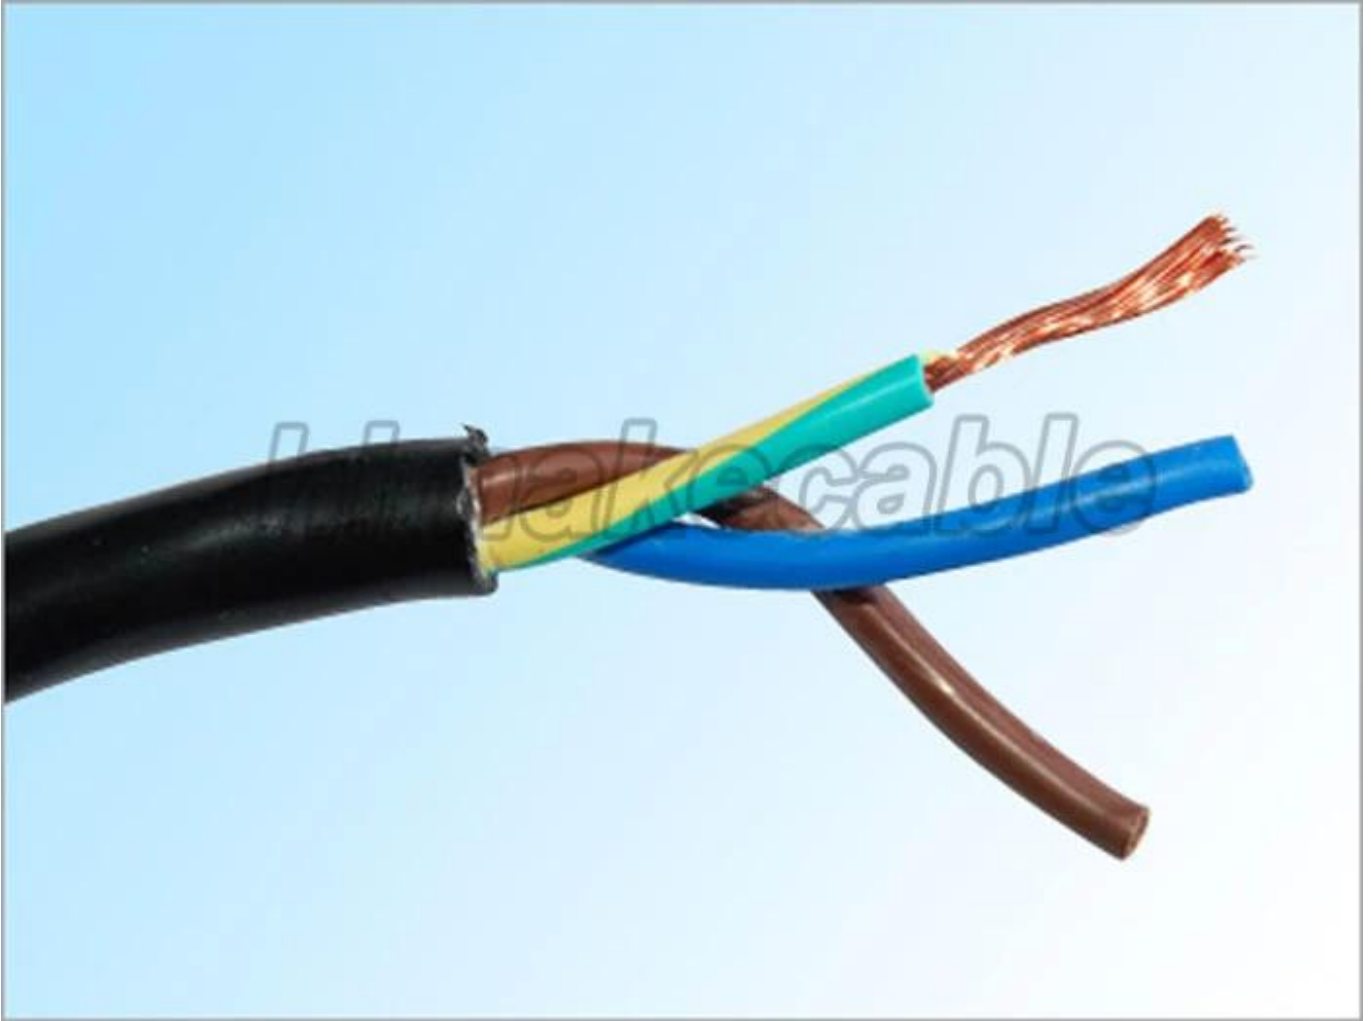

□□□□: 300/500 V

□□: □□ 5 □□□□□□□□

□□□□□□□: 0.5 □ 25sqmm

□□□: Rohs □□ PVC □□□□

□□□□□: □□□□□□□□□□□□ □□□□□/□□□□□□□□

□: □□□□□Rohs □□ PVC

□□□□□: □□□□□□□□□□□□□□□□

Max□□□□□□ 70□90

□□□□□: 100 m □□□□□□□□□□□□□□ □□

□□□□□□□: □ RVV ZR □ RVV□H05VV F□H07VV F

IEC60277 BS6500 VDE0281 GB/T IEC60332 5023

名稱:

符合 IEC60277 BS6500 VDE0281 GB/T IEC60332 5023 標準，符合 RoHS 指令。

規格:

符合 IEC60277 BS6500 VDE0281 GB/T IEC60332 5023 標準。

查詢: (電子郵件: info@himakecable.com)

規格 (mm ²)	股數	絕緣層厚度 (mm)	導體直徑 (mm)	總直徑 (mm)	重量 (kg/km)	絕緣電阻 (MΩ.km)
2 × 0.75	5	PVC/0.6	PVC/0.8	7.6	49.24	0.011
2 × 1	5	PVC/0.6	PVC/0.8	8	56.59	0.01
2 × 1.5	5	PVC/0.7	PVC/0.8	9	74.6	0.01
3 × 0.75	5	PVC/0.6	PVC/0.8	8	61.23	0.011
3 × 1	5	PVC/0.6	PVC/0.8	8.4	71.27	0.01
3 × 1.5	5	PVC/0.7	PVC/0.9	9.8	99.3	0.01
3 × 2.5	5	PVC/0.8	PVC/1.1	12	150.53	0.009
4 × 0.75	5	PVC/0.6	PVC/0.8	8.6	75.12	0.011
4 × 1	5	PVC/0.6	PVC/0.9	9.4	91.72	0.01
4 × 1.5	5	PVC/0.7	PVC/1.0	11	127.54	0.01
4 × 2.5	5	PVC/0.8	PVC/1.1	13	1,876	0.009

備註:

1. 符合 IEC60277 BS6500 VDE0281 GB/T IEC60332 5023 標準。





□□□□□□



3. 10 60 internationally

