

 海迈电缆
Himake Cable



www.himakecable.com
info@himakecable.com

□□□□ 300 / 500V

□□□ □□□5□□□□□□□□□□□□□□□□□□□□□□□□ □

□□□□□□□□ 0.5□6.0sqmm

□□□ PVC□□□

□□□□□□ □□□□□□/□

□□□□ PVC□□□

□□□□ □□□□□□□□□□□□□□□□

□□□□□□□□□□ 70°C□90°C

100% 100%

RVVB RVV H05VV-F H05RR-F

IEC60277 BS6500 VDE0281 GB / T5023 IEC60332

UV RoHS

UV RoHS

UV RoHS

UV RoHS

info@himakecable.com

V	mm ²	mm	Ω / km @ 20°C	Min Ω / km @ 70°C	A	kg / km
300 / 300V	2×0.5	3.8×6.0	39.0	0.012	10	28
300 / 300V	2×0.75	3.9×6.4	26.0	0.010	13	35
300 / 500V	2×0.75	5.0×7.6	26.0	0.010	13	44

UV RoHS

UV RoHS



2. 下列各句，其句意与原文不相符的一项是

（ ）




□□□□□□



3. 10 60 international ly



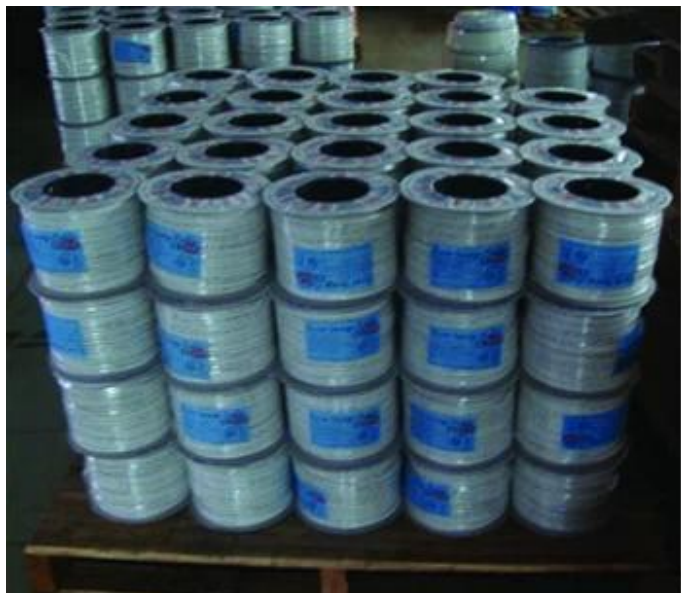

4. □□□□□□□□□□□□□□ □□□ □□ □□□□□ □□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□



5. □□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□



