


□□□□:

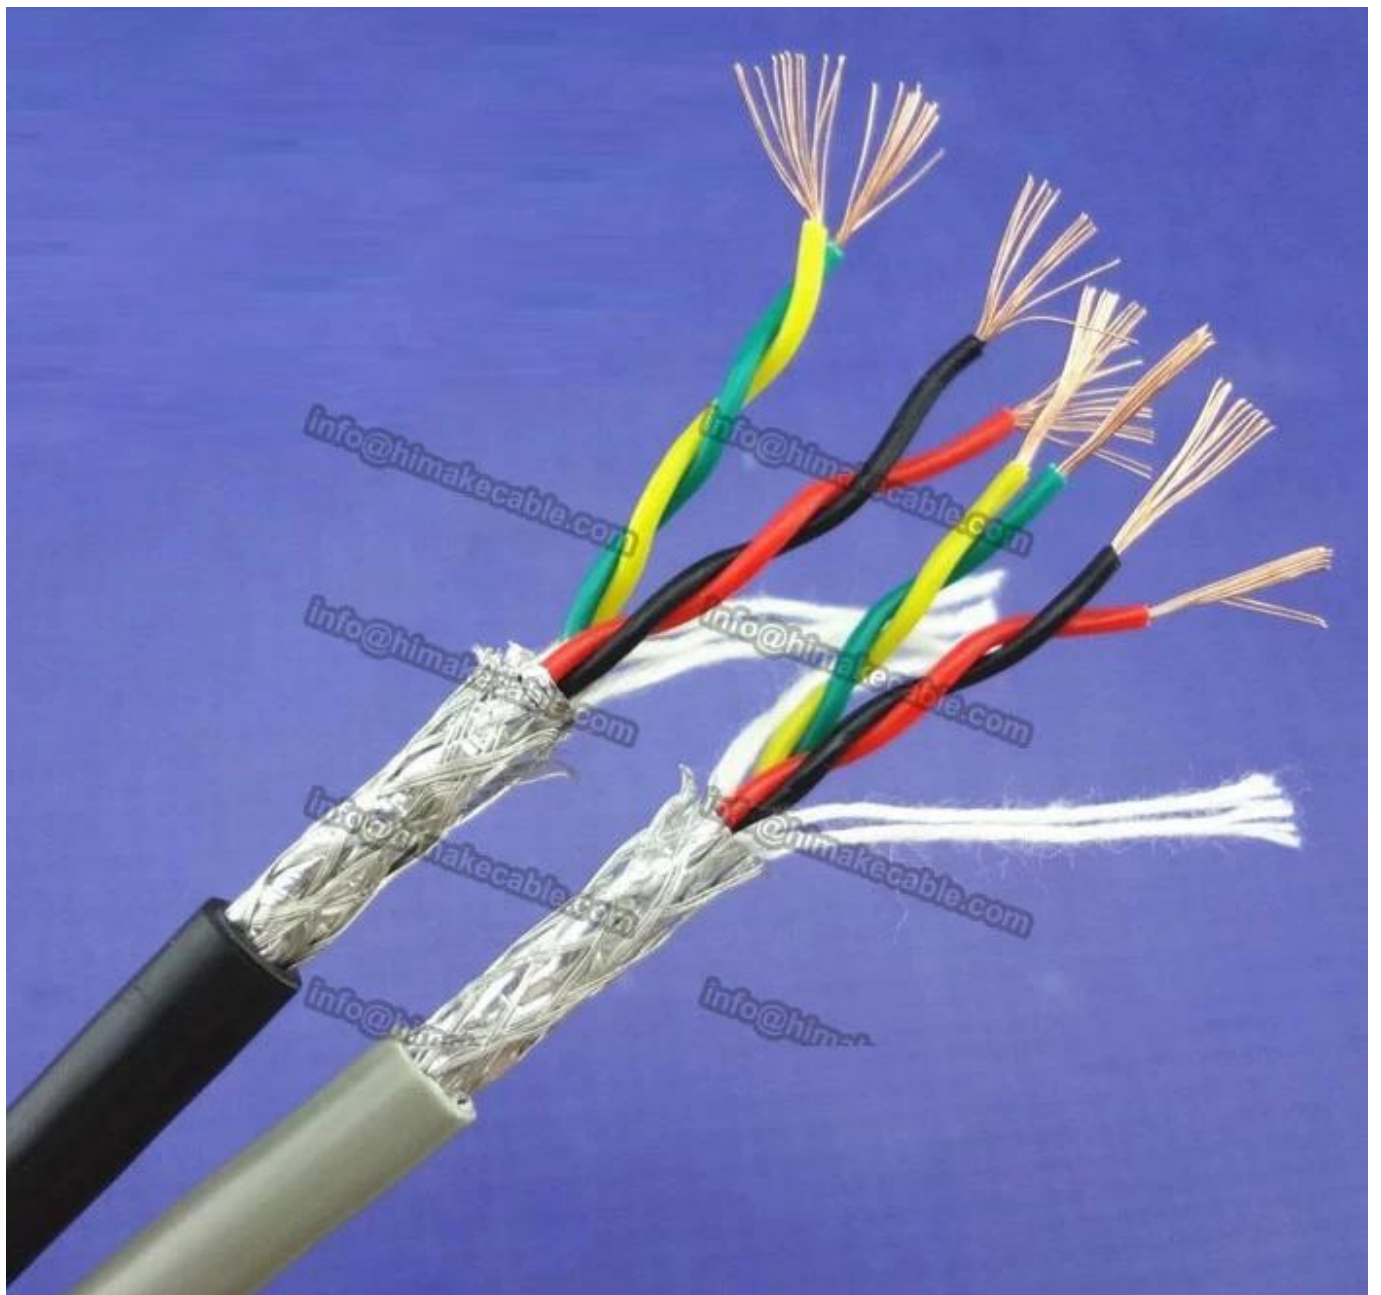

□□□□: 300/300 V

□□: □□ 5 □□□□□□□□□□□□ □□

□□□□□□: 0.12 □ 2.5sqmm

□□□: LSZH□PE LSOH

□□□□□: □□□□□□□□□□□□ □□□□□□

□□□□ □□□: □□□ □□□

产品型号: LSZH LSOH

品牌: LSZH LSOH

规格: 100 m

Max 90, 110, 125°C, 150

规格: 100 m

品牌: WDJ RYJYJSP

规格: IEC60277 BS6500 VDE0281 GB/T IEC60332 5023

品牌:

产品符合 RoHS 标准

品牌:

产品符合 RS485 标准

品牌: (info@himakecable.com)

规格 (mm 2)	截面积 (mm 2)	导体直径 (mm)	绞合率 (%)	Max 20°C 电阻 (Ω)	长度 (mm)
2 x 0.2	1.35	64/0.1	56.72	95	4.5
2 x 0.3	1.63	80/0.1	61	71.2	5.06
2 x 0.4	1.81	80/0.1	57.76	49.6	5.42
2 x 0.5	1.85	80/0.1	57.1	39	5.5
2 x 0.6	1.91	80/0.1	56.17	33	5.62
2 x 0.75	2.1	96/0.1	61.76	26	6
2 x 1.0	2.43	96/0.1	57.64	19.5	6.66
2 x 1.5	2.9	120/0.1	59.21	13.3	8
2 x 2	3.14	120/0.1	56.95	10.3	8.48

2 x 2.5	3.57	120/0.12	61.9	7.98	944
---------	------	----------	------	------	-----

□□□□□□:

1. □□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□





□□□□□□



3. 10 60 internationally





4. 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100.



5. 2011年10月，在“世界环境日”来临之际，我校开展了“绿色校园，从我做起”的环保主题活动。



2011年10月，在“世界环境日”来临之际，我校开展了“绿色校园，从我做起”的环保主题活动。

2011年10月，在“世界环境日”来临之际，我校开展了“绿色校园，从我做起”的环保主题活动。

