


□□□□ :

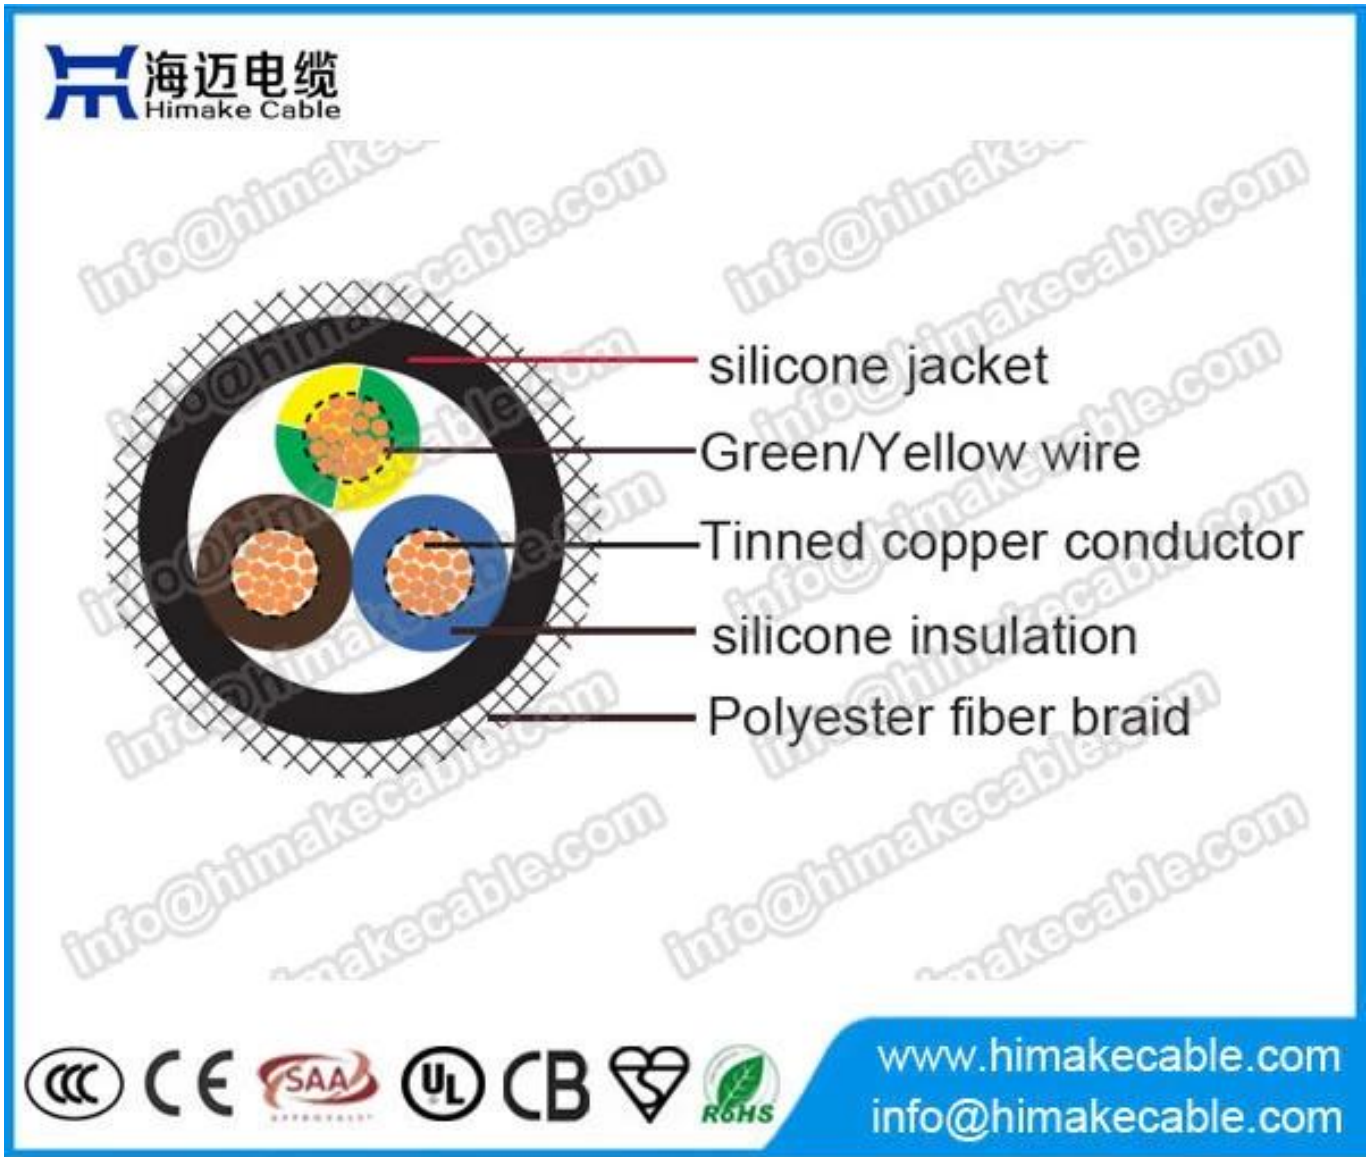

□□□□: 300/500v

00: 000000000000 000000000000500000000000

□□	:	□□□□□□
----	---	--------

0000: 2c: 0000 + 0000003c: 0000 + 0000 + 0000/0000, 4c: 0000 + 0000 + 0000 + 0000/0000, 5c: 0000 + 0000 + 0000 + 0000 + 0000/0000/HD308/0021089-1

品名: 鋼管H05SST 鋼管

□□□□□□ : □□□□□□□□ : □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□: 1□□□□100□□□□polywooden □□□□□□□□□□□□□□□□

使用温度: -60 °C ~ 180 °C

ts: ts hd 22.15

mm ²	mm	mm (mm)	mm	170° c (amp.)
2x0.75	0.6	0.8	6.2	5.4
2x1.0	0.6	0.9	6.7	7.0
2x1.5	0.8	1.0	7.9	9.4
2x2.5	0.9	1.1	9.3	12.2
3x0.75	0.6	0.9	6.8	5.1
3x1.0	0.6	0.9	7.1	6.7
3x1.5	0.8	1.0	8.4	9.0
3x2.5	0.9	1.1	9.9	11.6

- 1.



2. 在下列各题中，选择正确的答案，并将答案填入括号内。

（ ）



□□□□□□□□



3. 10mm 60mm







5. **responsibility**



