


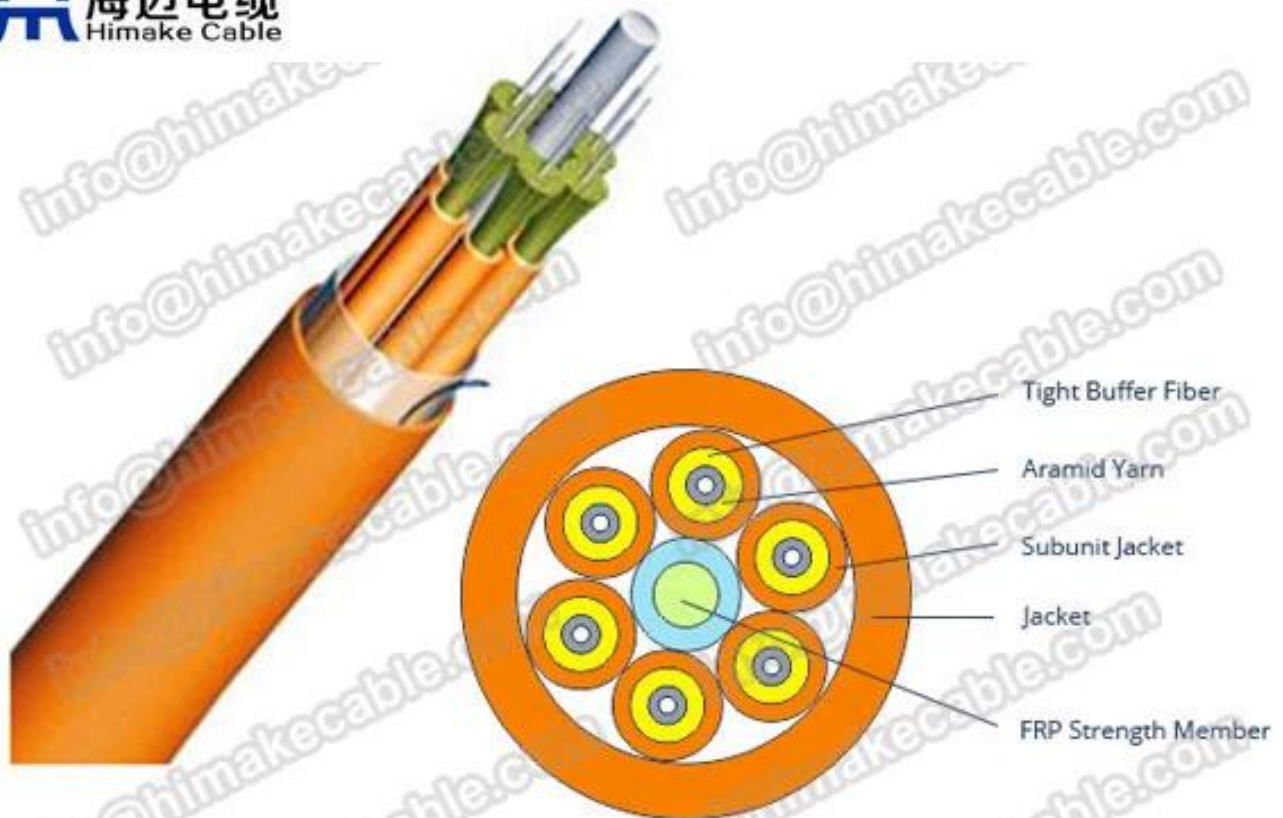

## Kenmerken van het product

1. Multi één kabelontwerp
2. enkele kabel met onafhankelijke sterkte lid
3. 2 ~ 24 kernen
4. niet-metalen centrale kracht lid

## Product toepassing

Aangenomen binnen niveau en verticale leggen, plafond leggen, oppervlakte leggen, enz. Geschikt voor patch snoeren en pigtails.

## De parameter product (meer informatie kunt u mailen naar: [info@himakecable.com](mailto:info@himakecable.com))

| Cstaat kern | Buitenste Verwarmingselement | Gewicht | Min. toegestane treksterkte (N) |               | Min. toegestane Crush belasting (N / 100mm) |               | Min. Buigen van Radius (mm) |               |
|-------------|------------------------------|---------|---------------------------------|---------------|---------------------------------------------|---------------|-----------------------------|---------------|
| Graaf       | (mm)                         | (kg/km) | Korte termijn                   | Lange termijn | Korte termijn                               | Lange termijn | Korte termijn               | Lange termijn |
| 02          | 7.0                          | 45      | 1500                            | 500           | 1000                                        | 300           | 20D                         | 10D           |
| 04          | 7.0                          | 47      | 1500                            | 500           | 1000                                        | 300           | 20D                         | 10D           |
| 06          | 8.3                          | 64      | 1500                            | 500           | 1000                                        | 300           | 20D                         | 10D           |
| 08          | 9.5                          | 88      | 1500                            | 500           | 1000                                        | 300           | 20D                         | 10D           |
| 12          | 11,5                         | 105     | 1500                            | 500           | 1000                                        | 300           | 20D                         | 10D           |
| 24          | 13,5                         | 142     | 1500                            | 500           | 1000                                        | 300           | 20D                         | 10D           |

## Productvoordelen

1. de dirigent is gemaakt van topkwaliteit optische vezels, het heeft lage dispersie en demping, ervoor moet zorgen dat een zeer goed signaal en data transmissie.



### **Brand new material**

- > **Smooth**
- > **Anti-UV**
- > **Long-life**

### **High Quality Fiber**

- > **Fast**
- > **Long and stability transmission**
- > **Low Attenuation.**



### **High Quality PBT Loose Tube Material**

- > **Anti-aging**
- > **Good Protection**

# ADVANCED PRODUCTION EQUIPMENT

Advanced Production Equipments can guarantee qualified product.



## Optic Fiber Cable Testing

- Fiber Testing
- Testing after fiber coloring
- Testing after fiber stranding
- Testing after fiber optic cable jacketing



## APPLICATION



✓ Pipeline



✓ Overhead



✓ Direct bury

### Packaging & Shipping

## PACKING AND SHIPPING



- Each single length of cable shall be reeled on wooden Drum suitable for long-distance shipment.