
Product Description:

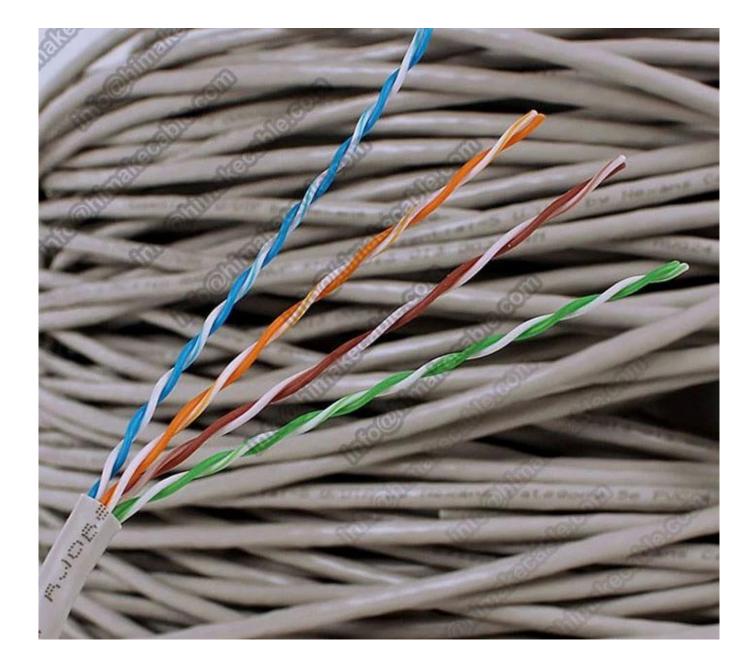

Product Description:

Conductor: CCS+CCA/CCA/CCU/BC

Conductor size: 0.51mm, 24AWG

Twist pairs: 4~50 pairs

Insulation: PE, HDPE

Insulation color: 4 pairs color: Blue/white-blue; Green/white-green; Orange/white-orange; Brown/white-

brown, color coded according to ANSI/TIA/EIA-568-B color code Inner sheath: PVC, ROHS PVC Sheath: flame retardant PVC Rohs compliant, LSZH compound Sheath color: white, grey, blue or as per request Package: 305 meters per box or as per requirement Main product model: Cat5e, HSYV5e, HSYY5e, HSYZ5e Product standard: ISO/IEC11801, IEC61156-2, YD/T1019-2001, ANSI/TIA/EIA-568B, UL444

Product characteristics:

Water proof, UV resistance and Rohs compliant; Feature different strand lay-length, keeping good NEXT and FEXT, anti-electromagnetic disturbing improvement; Structure CCS+CCA/CCA/CCU/BC conductor, HDP/PE insulation, FRPVC/LSOH PVC jacket, twinning structure, flexible added, easily cabling; High-performance data transmission.


Product application:

The cables transmission frequency up to 100MHz, used as cabling among the cross-connecting box and the communication output and of the operation area or between main distribution frames in the commercial building comprehensive wiring system and residential comprehensive wiring system, support 100BASE-T4/TX(FAST Ethernet), 100VG-AnyLAN Fast Ethernet, 1000Base-T Gigabit Ethernet, 1000Base-TX Gigabit Ethernet, 155Mbps, 622Mbps.

Packae datas: (more details please email us: info@himakecable.com)
---	---

Product	Norminal Cross-	Wire core	Insulationl	Calculation Outer	Product prox.
Туре	section	Structure	Diameter	Diameter	Weight
Describtion	(mm)	(No./mm)	(mm)	(mm)	(Kg/km)
Cat.5e UTP PVC	4x2x0.5(24AWG)	1/0.51	0.91	5.1	31

Cat.5e UTP PVC	25x2x0.5(24AWG)	1/0.51	0.91	11.5	175	
Cat.5e UTP LSZH	4x2x0.5(24AWG)	1/0.51	0.91	5.1	33	
Cat.5e UTP LSZH	25x2x0.5(24AWG)	1/0.51	0.91	11.5	179	

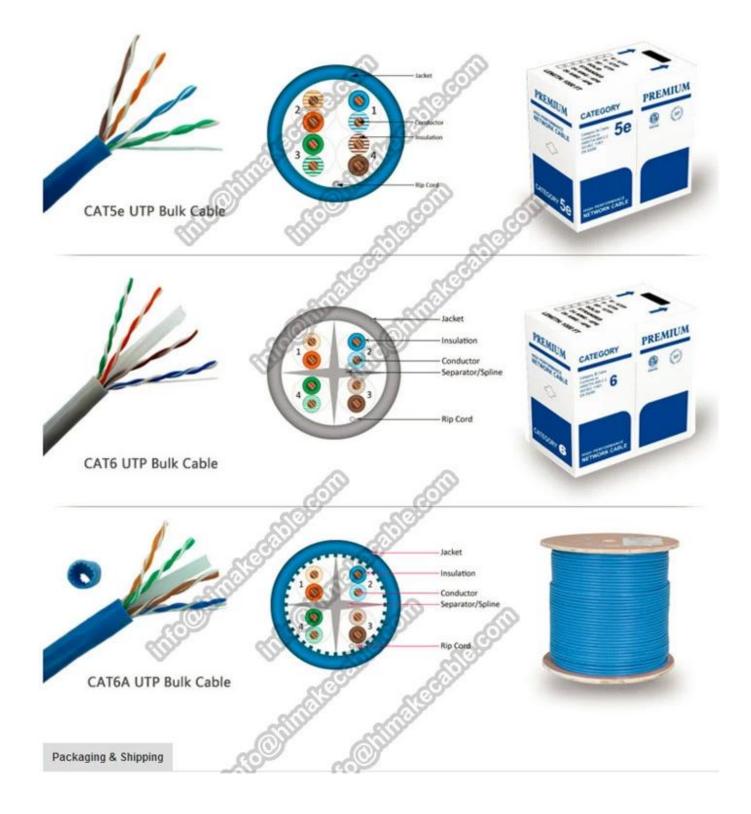



How to contact us?

Put your inquiry details in the box below, and click "Contact Now".