

Φορητή ηλιακή γεννήτρια A'1-150W Μπαταρία και αποθήκευση νέας ενέργειας
Εργοστάσιο στην Κίνα

Παράμετροι προϊόντος:

Είδος	Όνομα	A1
		Φορητή ηλιακή γεννήτρια
Γενικός Παράμετροι	Ενσωματωμένη μπαταρία	Υψηλής ποιότητας μπαταρία λιθίου
	Χωρητικότητα μπαταρίας	167Wh / 45000mAh / 3,7V
	Βάρος	1,6 κιλά
	Επαναφόρτιση εισόδου	DC15V/2,0A
	Πλήρως φορτισμένος χρόνος	DC: 15V: 8~9 ώρες
	Παραγωγή	USB 5V-3.1A (Μέγ.)
	DC Wattage (Μέγ.)	9~12,6V/10A, 120W (Μέγ.)
	Έξοδος AC	150W, Τροποποιημένη Έξοδος Κυμάτων. 110V (Κατασκευή ανάλογα με τα διαφορετικά έθνη)
	Ενδειξη λειτουργίας	Πίνακας ελέγχου LED
	Θερμοκρασία λειτουργίας	-10-40°C
	Κύκλος ζωής	>500 times
	Το πακέτο περιλαμβάνεται	1 x φορητή γεννήτρια ρεύματος 1 x Μετασχηματιστής ρεύματος 1 x Αντάπτορας φώτων τσιγάρου 1 x Εγχειρίδιο χρήσης 1 x Φορτιστής αυτοκινήτου
Παρατήρηση	Μπορεί να υπάρχουν κάποιες διαφορές σε διαφορετικά ανταλλακτικά. Παρακαλούμε ακολουθήστε το πραγματικό προϊόν.	



150W Portable
POWER STATION

TEAVEL Youth is very long
I was in the end looking back
Meeting the best self on the road



45000mAh

High-End ThreeElement Li-Battery

Portable
POWER GENERATOR

Fashion mainstream appearance, small portable,
4500mAh super capacity 2XUSB 3XDC 2XAC



room in super capacity, 40000mAh, with multifunctional output, meet many kinds of electrical appliance use, the display screen clear design is more science and technology sense, fashion fold handle, accord with human workmanship, let you travel more easily



UAV Lover Necessary

Dual AC port, 150W 45000mAh output, can charge 5000mAh UAV 9 times, anytime, anywhere





MULTI-FUNCTION & STRONG-POWER

AC DC USB output/45000mAh

AC output

Peak power 250W

DC output

Max power 120W

USB output

Max 5V/3.1A



SAFER AND MORE SECURE

Using 100% lithium core technology,
Built-in U.S.T safety technology, multiple safety, power, temperature tolerance

overcharge || overdischarge || overvoltage
overload || overtemperature || short circuit protection





Solar Charge

Recommended solar panel specification of 60W / 18V for better charging effect




Please put the solar panels in a sunny place



S.E.C SMART CONTROL

Adopt S.E.C intelligent control system, LED display screen display, make the whole product more intelligent, more scientific and technological sense, let the user know at a glance, the chapter shows the humanized design, when no output is turned on, the 15s is automatically turned off, so that the energy saving effect can be better realized.

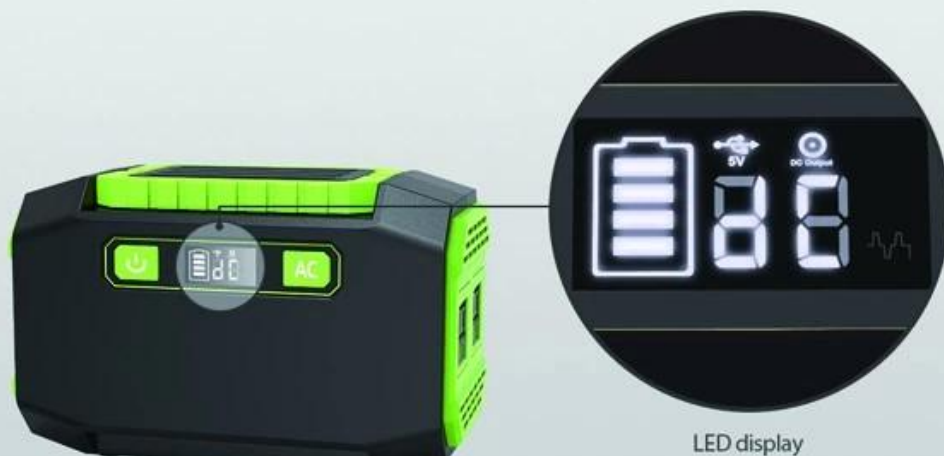



Function declaration



Capacity	45000mAh,3.7V /167Wh
Dimensions(LWH)	196x108x126mm
Weight	1.6Kg
Built-in Battery	High quality lithium battery
Input Recharging	DC15V/2A
Fully Charged Time	DC 15V:8~9 hours
Output	USB 5V-3.1A(Max)


DC Wattage(MAX)	9~12.6V/10A, 120W(Max)
AC Output	150W, Modified Wave Output. 110V(Build According to different nations)
Power Indicator	LED Control Panel
Operation temperature range	-10℃~40℃
Lifecycle	>500 times
Package include	1 x Portable Power Generator 1 x Power Adapter 1 x Cigarette light adapter 1 x User manual 1x Car charger

※ There may be some differences on different spare parts. Please adhere to the actual product instead.

PERFORMANCE COMPARISON

Battery Material

3.3 times smaller
5.0 times Lighter

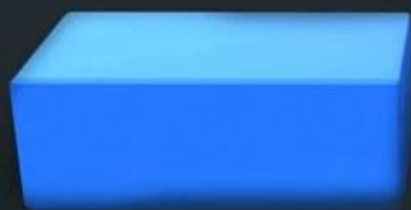

	Lithium	Lead Acid Batteries
Voltage	3.7V	2.0V
Lifecycles	500~1000	200
Energy Density	150WH/KG	30WH/KG
Volumetric Energy(Wh/L)	> 320	60-80
Charging/Discharging Efficiency	> 97%	< 80%
Stand-by Time	> 3 months	> 1 month
Working Temperature	-20℃~60℃	0℃~40℃
Weight	Light 2.5~3kg	Heavy 16~30kg

Πώς να επικοινωνήσετε μαζί μας;

Τοποθετήστε τα στοιχεία του ερωτήματός σας στο παρακάτω πλαίσιο και κάντε κλικ στο "Επικοινωνήστε τώρα".