



Product Description:

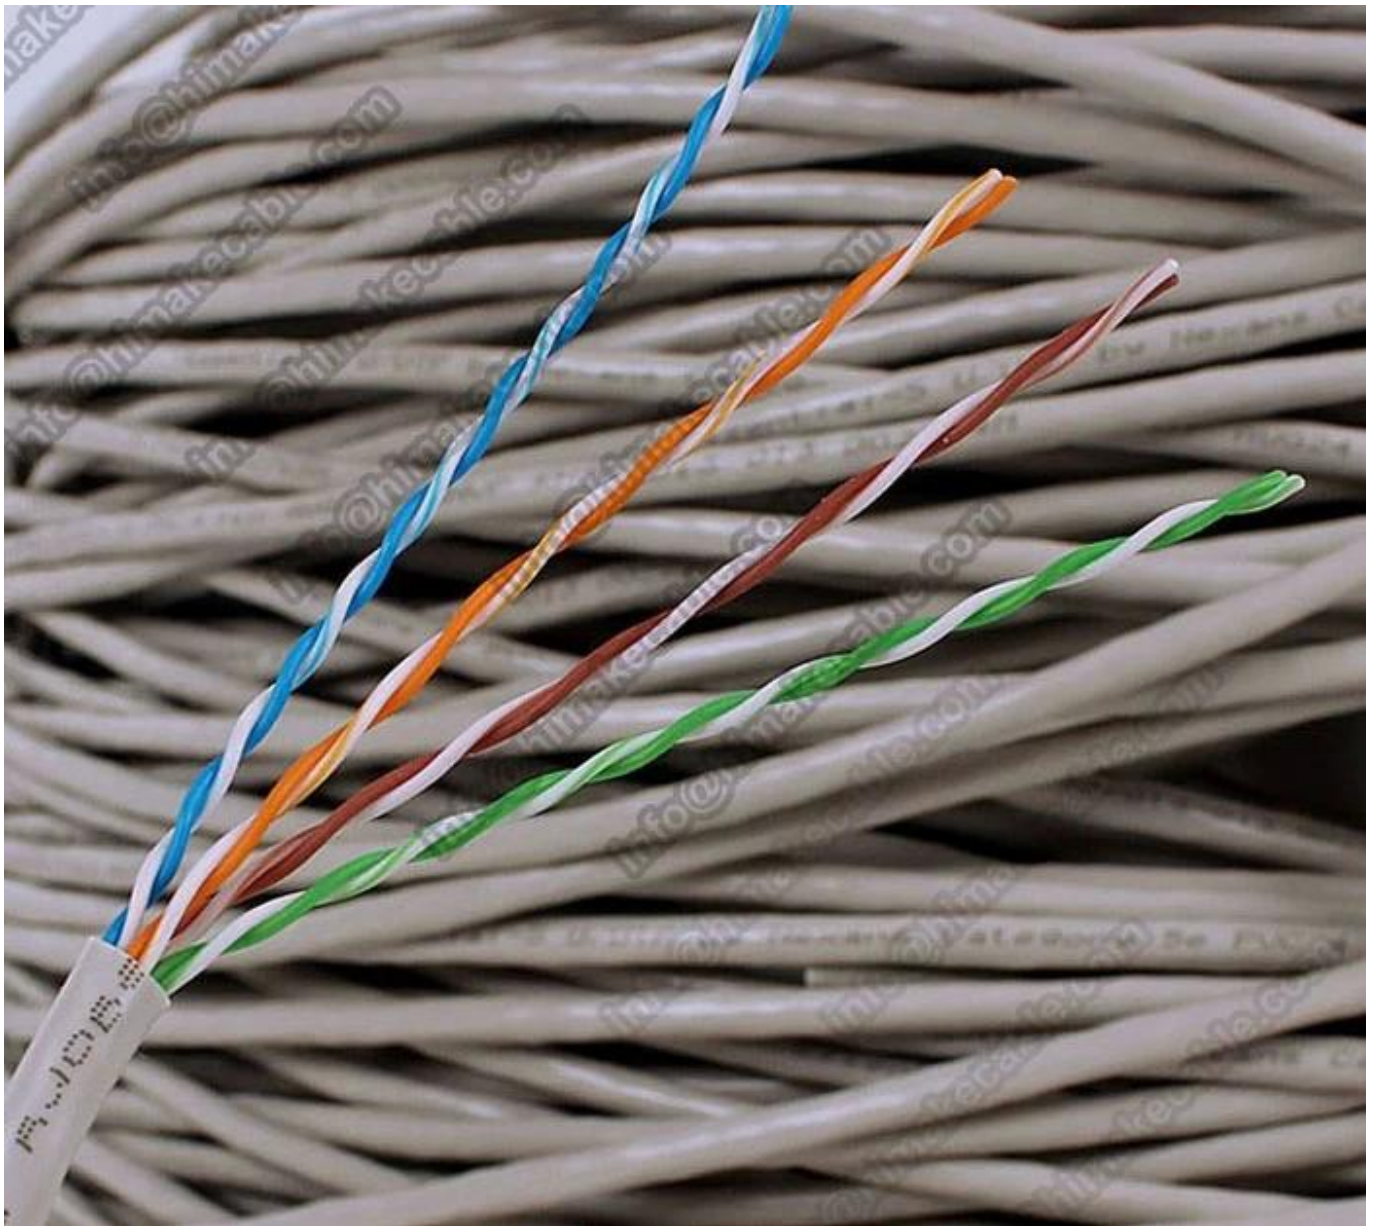

Model	CAT5E CABLE
Conductor Size	24AWG 0.5mm/0.51mm
Conductor Material	CCA/BC
Nuber Of Conductor	4Pair
Shiled	UTP/FTP
Flammability Grade	CMP,CMR
Insulation Material	HDPE
Insulation Diameter	0.91mm
Jacket Material	PVC, ROHS PVC, LSZH
Outer Jacket Diameter	5.3mm
DC Resistance(Max.)	9.5Ω/100m
DC Resistance Imbalance	2.50%

Working Capacitance(Max.)	5.4nF/100m
Insulation Resistance	10000 MΩ.km
Transmission Velocity	65%
Operating Temperation	-40 °C - +75 °C
PVC Jacket Color	As client's request.
Marking On Jacket	On your request (Print your brand)
Construcation Draw	

Product characteristics:

1. High quality CAT5E cable 4Pair UTP 24AWG solid bare copper 1000ft
2. High-Performance data cable ,application structured cabling, CCTV system , Alarm system , Telecom project etc
3. Exceeds TIA/EIA-568B.2,ISO/IEC 11801 , ETL listed
4. 100Base-TX,100Base-T2 and 100Base-T4 standard
5. Can be used for voice, integrated service data network (ISDN)
6. Long transmission distance, small transmission loss, wear resistance, resistance to pressure

Product application:

- 1.10/100/1000Mbps Ethernet
- 2.100VG-AnyLAN
3. Token ring
4. ATM155/ATM622 etc


Packae datas: (more details please email us: info@himakecable.com)

Goods	Packing	Packing(cm)		Packing		Dimension(cm)			Unit.	QTY/Container	
Name	Type	GIFTBOX	CARTON	GIFTBOX	CARTON	L	W	H	CBM	20GP	40HQ


UTP CAT5E	IN GIFT BOX	19*35*35	41*37*36	305m/roll	2roll/ctn	41	36	37	0.055	1000	2450
FTP/SFTP CAT5E	IN GIFT BOX	21*35*35	45*37*37	305m/roll	2roll/ctn	45	37	37	0.062	900	2200
CAT5E OUTDOOR	WOODEN REEL	32*32*22.5	66*35*24	305m/Reel	2reel/ctn	66	35	24	0.055	1000	2400




CAT5e UTP Bulk Cable

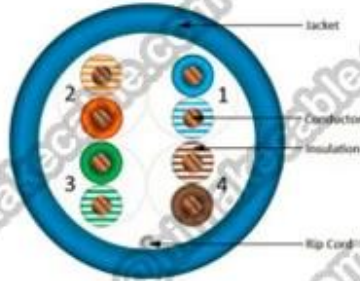

CAT6 UTP Bulk Cable

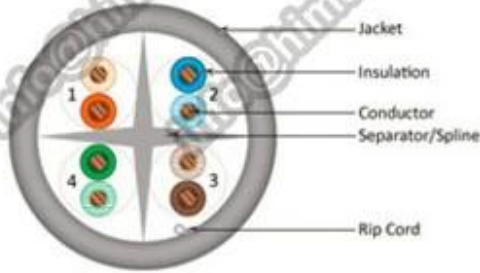

CAT6A UTP Bulk Cable

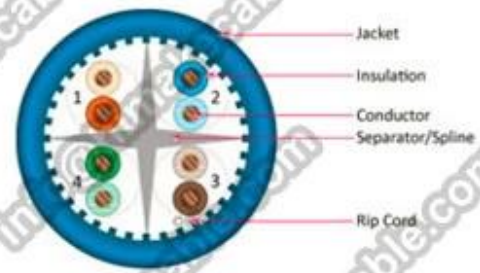

Packaging & Shipping



305m/pull out box



colour pull out box



2boxes in carton



305m/wooden reel



1000ft/wooden reel



305m wooden reel in carton



warehouse



warehouse



shipment

How to contact us?

Put your **inquiry details** in the **box below**, and click "**Contact Now**".